

FORM PTO-1390 (Modified) (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER Y-189	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/937858	
INTERNATIONAL APPLICATION NO. PCT/JP00/02670		INTERNATIONAL FILING DATE 24 April 2000		PRIORITY DATE CLAIMED 22 April 1999	
TITLE OF INVENTION IMAGE FORMING DEVICE					
APPLICANT(S) FOR DO/EO/US Yuji MATSUDA					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 11. <input checked="" type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409). 12. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210). 					
<p>Items 13 to 20 below concern document(s) or information included:</p> <ol style="list-style-type: none"> 13. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 14. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 15. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 16. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 17. <input type="checkbox"/> A substitute specification. 18. <input type="checkbox"/> A change of power of attorney and/or address letter. 19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 20. <input checked="" type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 21. <input checked="" type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 22. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail 23. <input checked="" type="checkbox"/> Other items or information: 					
<p>Inventor Information Sheet (Patent Bibliographical Data) Form PTO-1449 and copies of documents listed thereon w/2nd copy of Int. Search Report Copy of Form PCT/IB/308</p>					

Express Mail #EL898003059US

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.492 (a)(1) - (5)) : <div style="font-size: 2em; font-weight: bold; margin-left: 100px;">09/937858</div>		INTERNATIONAL APPLICATION NO. <div style="text-align: center; font-weight: bold;">PCT/JP00/02670</div>		ATTORNEY'S DOCKET NUMBER <div style="text-align: center; font-weight: bold;">Y-189</div>	
---	--	---	--	---	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <div style="margin-left: 20px;"> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1000.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 </div> <div style="text-align: right; margin-top: 10px;"> ENTER APPROPRIATE BASIC FEE AMOUNT = <div style="border: 1px solid black; padding: 2px; display: inline-block; width: 150px; text-align: center;">\$860.00</div> </div>				CALCULATIONS PTO USE ONLY <div style="border: 1px solid black; height: 100px; margin-top: 10px;"></div>	
--	--	--	--	---	--

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 150px;">\$0.00</div>	
---	--	--	--	---	--

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	15 - 20 =	0	x \$18.00		\$0.00
Independent claims	3 - 3 =	0	x \$80.00		\$0.00
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>					\$0.00
TOTAL OF ABOVE CALCULATIONS =					\$860.00
<input type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.					\$0.00
SUBTOTAL =					\$860.00
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				+	\$0.00
TOTAL NATIONAL FEE =					\$860.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input checked="" type="checkbox"/>					\$40.00
TOTAL FEES ENCLOSED =					\$900.00
					Amount to be: refunded \$
					charged \$

a. ☐ A check in the amount of _____ to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☐ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. _____. A duplicate copy of this sheet is enclosed.

d. ☒ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

James H. Walters
 802
 DELLETT AND WALTERS
 310 S.W. Fourth Avenue, Suite 1101
 Portland, Oregon 97204 US
 (503) 224-0115

SIGNATURE
 James H. Walters
 NAME
 35,731
 REGISTRATION NUMBER
 Sept 28, 2001
 DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of
Yuji MATSUDA

S. N.

International S.N.: PCT/JP00/02670

Filed:

International Filing Date: 24 April 2000

For: IMAGE FORMING DEVICE

PRELIMINARY AMENDMENT

Box PCT
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Please make the following amendments to this application
prior to examination thereof:

In the Specification:

Page 2, line 24 through page 4, line 7, please replace
these 2 paragraphs with the following 2 paragraphs:

The technology for reading the test pattern via a sensor is disclosed in Japanese Patent Laid-Open Publication No. Hei 7-323582. As shown in FIG. 15, the base recording head, one of a plurality of recording heads, and each of the other recording heads print a pattern made up of two parallel bars (pattern elements) to allow the sensor to read the same position of the parallel bars twice to detect the recording head deviation amount. That is, in the first scan, the sensor senses the width of each pattern element to calculate the center dot position

EXPRESS MAIL #EL898003059US

thereof. Then, in the second scan, the sensor senses the width W1 between the pattern elements of the base head, based on the center dot positions of the pattern elements. Repeating the above-described operation for the pattern element of the base head and those of the other heads to calculate the widths (distances) W2, ..., between the pattern elements of the base head and those of the other heads. Then, the head deviation amount ΔW is calculated based on the difference of those widths.

To do so, a comparator 1502 converts the analog signal, which is output from a sensor 1501, into a binary (bi-level) signal as shown in FIG. 16. In the first scan, this binary signal is sampled in a predetermined timing in accordance with a timer 1503. Each time a pattern element is read, a CPU 1505 references the value of the timer 1503 to read the pattern width data of each of two pattern elements. After the scan is terminated, the distance from the edge of the pattern element to the center dot is calculated from the scan speed and the sampling frequency, based on the width data of each of two pattern elements. After that, setting the center value of each pattern element in the timer 1503 immediately before the pattern is read in the second scan causes the timer 1503 to output a carry signal at the time the carriage reaches the center position of the pattern element. By operating a timer 1504 using this carry signal, the distance between the center dot position of a pattern element and that of another pattern

element is calculated. This is done for the pattern elements of the base head and for the pattern elements of the base head and other heads to calculate the head deviation amount ΔW .

Page 14, lines 3-10, please replace this paragraph with the following paragraph:

A linear scale 109 provided next to, and parallel with, the scanning path of the carriage 106 has slits provided therealong at a predetermined resolution (resolution). A transmission type optical sensor (1203 in FIG. 12) installed near the carriage 106 reads the slits on the linear scale 109 to obtain two signals each with its own phase (90° out of phase). These signals are used to manage the position of the carriage 106 and, at the same time, synchronize the ink jet from the recording head 101.

In the Claims:

Please amend claims 4, 5, 7 and 10 by replacing them with the like numbered claims hereinbelow. A markup sheet is included to illustrate the amendments made.

4. (Amended) The image forming device according to claim 1 wherein said pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

5. (Amended) The image forming device according to claim 1 wherein said low-resolution position detecting means

comprises a counter for counting a timing signal based on said linear scale and wherein said high-resolution position detecting means comprises a timer which is initialized by said timing signal and measures a time with a predetermined clock signal.

7. (Amended) The image forming device according to claim 1 wherein said calculating means uses said pattern detecting means to detect the vertical bar at least two positions in a longitudinal direction of said vertical bar to obtain a print position of said vertical bar based on an average value of the detected results.

10. (Amended) The image forming device according to claim 1 wherein, based on both edges of an obtained pattern element, said calculating means calculates a center position of a width of the pattern element.

Add new claims 13-17 as follows:

13. The image forming device according to claim 2 wherein said pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

14. The image forming device according to claim 3 wherein said pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

15. The image forming device according to claim 2 wherein said low-resolution position detecting means comprises a counter for counting a timing signal based on said linear scale and wherein said high-resolution position detecting means comprises a timer which is initialized by said timing signal and measures a time with a predetermined clock signal.

16. The image forming device according to claim 6 wherein said calculating means uses said pattern detecting means to detect the vertical bar at least two positions in a longitudinal direction of said vertical bar to obtain a print position of said vertical bar based on an average value of the detected results.

17. The image forming device according to claim 9 wherein, based on both edges of an obtained pattern element, said calculating means calculates a center position of a width of the pattern element.


REMARKS

The above amendments to the specification are to correct minor typographical errors wherein the symbols "Δ" and "°" did not print out properly in the specification. These corrections are apparent from the meaning of the text and from review of the associated drawings. The amendments to the claims are presented to put the multiple dependent claims in non-multiple dependent format.

Markup sheets showing the changes to the specification and
to the claims are included.

Please contact the undersigned if there are any questions.

Respectfully submitted,

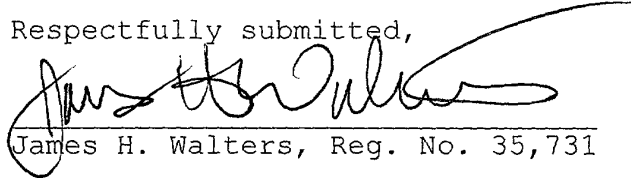

James H. Walters, Reg. No. 35,731

802
DELLETT AND WALTERS
Suite 1101
310 S.W. Fourth Avenue
Portland, Oregon 97204 US
(503) 224-0115
DOCKET: Y-189

802
DELLETT AND WALTERS
Suite 1101
310 S.W. Fourth Avenue
Portland, Oregon 97204 US
(503) 224-0115
DOCKET: Y-189

MARKUP SHEET SHOWING CLAIM AMENDMENTS MADE HEREIN

4. (Amended) The image forming device according to [one of claims 1-3] claim 1 wherein said pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

5. (Amended) The image forming device according to claim 1 [or 2] wherein said low-resolution position detecting means comprises a counter for counting a timing signal based on said linear scale and wherein said high-resolution position detecting means comprises a timer which is initialized by said timing signal and measures a time with a predetermined clock signal.

7. (Amended) The image forming device according to claim 1 [or 6] wherein said calculating means uses said pattern detecting means to detect the vertical bar at least two positions in a longitudinal direction of said vertical bar to obtain a print position of said vertical bar based on an average value of the detected results.

10. (Amended) The image forming device according to claim 1 [or 9] wherein, based on both edges of an obtained pattern element, said calculating means calculates a center position of a width of the pattern element.

heads are mounted, as shown in FIG. 14(b), sometimes generates horizontal stripes and results in an unevenly printed image.

In addition, on a device that uses a linear scale for establishing ink jet synchronization to jet ink at correct
 5 positions in the main scanning direction of the recording head, a jet position deviation ($W2 + W3$) may occur during forward and backward printing depending upon the movement speed of the carriage, sometimes resulting in an uneven image printing. This deviation is caused by a delay generated before the ink is
 10 jetted from the time of passing the slit position as shown in FIG. 14(c).

Therefore, when a color registration error (hereinafter called a registration deviation) occurs through the recording head replacement or for some other reasons, the individual
 15 recording heads must be registered (i.e. registration adjustment). A registration deviation amount must be detected before making the registration adjustment. There are two methods of detecting registration deviation amounts: one is to print a particular test pattern, designed to make a registration
 20 deviation readily detectable, on paper so that human beings can check the print result to manually detect a registration amount, and the other is to cause a sensor to read a test pattern to detect a registration deviation.

The technology for reading the test pattern via a sensor is
 25 disclosed in Japanese Patent Laid-Open Publication No. Hei 7-323582. As shown in FIG. 15, the base recording head, one of a plurality of recording heads, and each of the other recording

REPLACED 47

heads print a pattern made up of two parallel bars (pattern elements) to allow the sensor to read the same position of the parallel bars twice to detect the recording head deviation amount. That is, in the first scan, the sensor senses the width

5 of each pattern element to calculate the center dot position thereof. Then, in the second scan, the sensor senses the width W_1 between the pattern elements of the base head, based on the center dot positions of the pattern elements. Repeating the above-described operation for the pattern element of the base

10 head and those of the other heads to calculate the widths (distances) W_2, \dots , between the pattern elements of the base head and those of the other heads. Then, the head deviation amount ~~AW~~^{AW} is calculated based on the difference of those widths.

15 To do so, a comparator 1502 converts the analog signal, which is output from a sensor 1501, into a binary (bi-level) signal as shown in FIG. 16. In the first scan, this binary signal is sampled in a predetermined timing in accordance with a timer 1503. Each time a pattern element is read, a CPU 1505

20 references the value of the timer 1503 to read the pattern width data of each of two pattern elements. After the scan is terminated, the distance from the edge of the pattern element to the center dot is calculated from the scan speed and the sampling frequency, based on the width data of each of two

25 pattern elements. After that, setting the center value of each pattern element in the timer 1503 immediately before the pattern is read in the second scan causes the timer 1503 to output a

carry signal at the time the carriage reaches the center
 position of the pattern element. By operating a timer 1504
 using this carry signal, the distance between the center dot
 position of a pattern element and that of another pattern
 5 element is calculated. This is done for the pattern elements of
 the base head and for the pattern elements of the base head and
 other heads to calculate the head deviation amount ~~now~~ ^{Δw}.

However, in this case, the signal is sampled in a
 predetermined timing. Therefore, the carriage speed varies
 10 during carriage scanning, from scan to scan, or from device to
 device due to various mechanical factors such as the tension of
 a drive belt connecting the carriage and the motor. This
 variation is accumulated in the sampling results, sometimes
 affecting the precision of registration adjustment. In
 15 addition, detecting each pattern-to-pattern width W_1 , W_2 , ...
 requires the carriage to scan twice, thus requiring a long
 detection time and, at the same time, doubling the accumulation
 variation.

This applies also to the paper conveyance direction.
 20 Variations in the paper conveyance roller diameter,
 eccentricity, and gears connecting the motor to the roller
 generate accumulation variations in the accumulated sampling
 results.

In view of the foregoing, it is an object of the present
 25 invention to provide an image forming device capable of
 precisely detecting a recording head deviation when the
 recording head has been replaced.

operation of the carriage 106 (and head 101) and the paper feed operation in this way records an entire image.

5 A linear scale 109 provided next to, and parallel with, the scanning path of the carriage 106 has slits provided therealong at a predetermined resolution (resolution). A transmission type optical sensor (1203 in FIG. 12) installed near the carriage 106 reads the slits on the linear scale 109 to obtain two signals each with its own phase (90° out of phase). These signals are used to manage the position of the carriage 106 and, at the same time, synchronize the ink jet from the recording head 101.

10 In this embodiment, a recording head with the resolution of 600 dots/inch and a linear scale with the resolution of 600 dots/inch are used to allow an image to be printed at 600 dots/inch.

15 Also provided near the carriage 106 in this embodiment is a reflective type optical sensor 110. When any of the recording heads 101 on the carriage 106 cannot form a good image because any of plural recording elements are damaged or ink is not jetted from those elements, the recording head must be replaced.

20 When some of a plurality of recording heads or all of them have been replaced or when the positional relationship among the plurality of recording heads is not correct for some reasons, the images, each formed in a color, are not registered correctly. This is a serious problem because a good image cannot be obtained. Therefore, when a color deviation (registration deviation) occurs at head replacement time or for some reasons, the positions of the recording heads must be

22/pvt

1

SPECIFICATION

IMAGE FORMING DEVICE

Technical Field

- 5 The present invention relates to an image forming device that forms an image with the ink jet recording method.

Background Art

- 10 In the ink jet recording method, pulse signals are applied to a heater disposed in an ink-filled nozzle to heat the heater, to boil ink, and to cause the boiled ink to increase the vapor pressure to jet ink. To use this method on an image forming device, a plurality of nozzles are arranged to form one recording head, and a plurality of recording heads (for example, 15 for jetting ink in cyan, magenta, yellow, black, and so on) are combined, to form a full-color image.

- 20 Conventionally, when forming an image using a plurality of recording heads by the ink jet recording method, the problem is that a horizontal deviation between any two recording heads, as shown in FIG. 14(a), is sometimes introduced when the recording heads are mounted on a carriage at a factory at shipment time or when a service engineer or a user replaces one or more recording heads. (In the example shown in the figure, the recording head of cyan (C) is deviated from the correct position by W). This 25 deviation sometimes generates vertical stripes at print time and results in an unevenly printed image. Similarly, a vertical deviation between any two recording heads introduced when the

Express Mail #EL898003059US

heads are mounted, as shown in FIG. 14(b), sometimes generates horizontal stripes and results in an unevenly printed image.

In addition, on a device that uses a linear scale for establishing ink jet synchronization to jet ink at correct
5 positions in the main scanning direction of the recording head, a jet position deviation ($W2 + W3$) may occur during forward and backward printing depending upon the movement speed of the carriage, sometimes resulting in an uneven image printing. This deviation is caused by a delay generated before the ink is
10 jetted from the time of passing the slit position as shown in FIG. 14(c).

Therefore, when a color registration error (hereinafter called a registration deviation) occurs through the recording head replacement or for some other reasons, the individual
15 recording heads must be registered (i.e. registration adjustment). A registration deviation amount must be detected before making the registration adjustment. There are two methods of detecting registration deviation amounts: one is to print a particular test pattern, designed to make a registration
20 deviation readily detectable, on paper so that human beings can check the print result to manually detect a registration amount, and the other is to cause a sensor to read a test pattern to detect a registration deviation.

The technology for reading the test pattern via a sensor is
25 disclosed in Japanese Patent Laid-Open Publication No. Hei 7-323582. As shown in FIG. 15, the base recording head, one of a plurality of recording heads, and each of the other recording

heads print a pattern made up of two parallel bars (pattern elements) to allow the sensor to read the same position of the parallel bars twice to detect the recording head deviation amount. That is, in the first scan, the sensor senses the width of each pattern element to calculate the center dot position thereof. Then, in the second scan, the sensor senses the width W_1 between the pattern elements of the base head, based on the center dot positions of the pattern elements. Repeating the above-described operation for the pattern element of the base head and those of the other heads to calculate the widths (distances) W_2, \dots , between the pattern elements of the base head and those of the other heads. Then, the head deviation amount ΔW is calculated based on the difference of those widths.

15 To do so, a comparator 1502 converts the analog signal, which is output from a sensor 1501, into a binary (bi-level) signal as shown in FIG. 16. In the first scan, this binary signal is sampled in a predetermined timing in accordance with a timer 1503. Each time a pattern element is read, a CPU 1505

20 references the value of the timer 1503 to read the pattern width data of each of two pattern elements. After the scan is terminated, the distance from the edge of the pattern element to the center dot is calculated from the scan speed and the sampling frequency, based on the width data of each of two

25 pattern elements. After that, setting the center value of each pattern element in the timer 1503 immediately before the pattern is read in the second scan causes the timer 1503 to output a

carry signal at the time the carriage reaches the center position of the pattern element. By operating a timer 1504 using this carry signal, the distance between the center dot position of a pattern element and that of another pattern element is calculated. This is done for the pattern elements of the base head and for the pattern elements of the base head and other heads to calculate the head deviation amount $\epsilon\phi W$.

However, in this case, the signal is sampled in a predetermined timing. Therefore, the carriage speed varies during carriage scanning, from scan to scan, or from device to device due to various mechanical factors such as the tension of a drive belt connecting the carriage and the motor. This variation is accumulated in the sampling results, sometimes affecting the precision of registration adjustment. In addition, detecting each pattern-to-pattern width W_1, W_2, \dots requires the carriage to scan twice, thus requiring a long detection time and, at the same time, doubling the accumulation variation.

This applies also to the paper conveyance direction. Variations in the paper conveyance roller diameter, eccentricity, and gears connecting the motor to the roller generate accumulation variations in the accumulated sampling results.

In view of the foregoing, it is an object of the present invention to provide an image forming device capable of precisely detecting a recording head deviation when the recording head has been replaced.

In addition, variations in the shape or the direction of nozzles, introduced when manufacturing the recording head, will cause ink droplets to be jetted, not in exactly correct positions in a straight row as shown in FIG. 23(a), but in positions shifted vertically and/or horizontally as shown in FIGS. 23(b)-23(d). In the method described above in which a test pattern is read by the sensor to detect a registration deviation amount, two parallel pattern elements are printed by the base head and each of other heads. Then, the sensor reads the width of each pattern element from the edges of the pattern as well as the distance between the centers of the pattern elements of the base head and each of the other heads. Therefore, variations in the edges of pattern elements are generated as described above, and those variations generate read errors.

Also, when mounting a recording head 101 on a carriage 106, mechanical variations in the recording head 101 and the carriage 106 may cause the recording head 101 to be inclined with respect to the main scanning direction as shown in FIG. 24. In addition, the position at which a sensor 110 is mounted on the carriage 106 may vary according to the device. The recording head 101, if inclined with respect to the carriage 106, causes the pattern elements to be inclined as shown in FIGS. 25(b) and 25(c) although those pattern elements should be vertical bars (FIG. 25(a)). On the other hand, if the sensor read positions in the longitudinal direction of the pattern element vary as indicated by A to D, detection errors up to the value d occur.

As described above, there is a possibility in the conventional registration detection method that the pattern detection result varies greatly according to the manufacturing variations in the recording head 101, how the recording head 101 is mounted on the carriage 106, and how the sensor 110 is mounted.

Therefore, it is another object of the present invention to provide an image forming device capable of detecting a test pattern more precisely in order to precisely detect a head deviation when a recording head has been replaced.

Disclosure of Invention

An image forming device according to the present invention forms an image on a print paper in an ink jet recording method with a plurality of heads. The device comprises main scanning direction moving means for moving a carriage in a main scanning direction, the carriage having the plurality of heads mounted thereon; paper conveying means for conveying the print paper in a sub-scanning direction; pattern printing means for printing, with at least one head, a test pattern including predetermined pattern elements; pattern detecting means, mounted on the carriage, for detecting the pattern elements of the test pattern printed on the print paper by the printing means; binary conversion means for binarizing an output of the pattern detecting means; position detecting means for detecting a position of the carriage in the main scanning direction; and calculating means for moving the carriage to detect the pattern

elements of the test pattern with the pattern detecting means, for detecting a print position of the pattern elements based on a detection result of the position detecting means when a rising and/or falling edge of a binary signal obtained by the binary
5 conversion means is generated, and for calculating a mounting deviation amount of each head in the major scanning direction, wherein the position detecting means comprises low-resolution position detecting means based on a linear scale provided on a movement path of the carriage and high-resolution position
10 detecting means for detecting a position more finely than a minimum unit determined by a resolution of the low-resolution position detecting means. In this way, the device according to the present invention detects the position of the carriage at a time of a change in the output from the pattern detecting means,
15 allowing the position of the pattern element to be detected precisely without being affected by the carriage speed variations generated by mechanical causes. In addition, the mounting error of each head may be obtained by finding the position of the pattern element in one single scan and by
20 comparing it with the indicated print position of the pattern. Combining the low-resolution position detecting means with the high-resolution position detecting means makes it possible to detect the position of the pattern element more precisely.

The test pattern is, for example, at least one vertical bar
25 extending in the sub-scanning direction almost perpendicular to the main scanning direction.

The test pattern may include, for each head and as a

pattern element, at least one horizontal bar extending almost in parallel with the main scanning direction. In this case, the device further comprises conveyance amount detecting means for detecting a conveyance amount of the print paper in the sub-
 5 scanning direction almost perpendicular to the main scanning direction; and measuring means for measuring the conveyance amount equal to or smaller than the unit of the timer of the conveyance amount detecting means. The calculating means moves the print paper, on which the test pattern is printed, with the
 10 use of the paper conveying means with respect to the carriage to detect the pattern elements of the test pattern with the pattern detecting means, detects the print position of the pattern elements based on the detection results of the conveyance amount detecting means and the measuring means when a rising and/or
 15 falling edge of the binary signal obtained by the binary conversion means is generated, and calculates an amount of mounting deviation of each head in the sub-scanning direction based on the print position of the pattern elements printed by each head.

20 The pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

The low-resolution position detecting means comprises, for example, a counter for counting a timing signal based on the
 25 linear scale, and the high-resolution position detecting means comprises a timer which is initialized by the timing signal and measures a time with a predetermined clock signal.

The pattern printing means may cause each of different portions of a single head to print a plurality of dots sequentially in a plurality of passes, the plurality of dots constituting a portion of the vertical bar. This method, what
5 we call multi-pass recording, reduces horizontal positional deviations at upper and lower portions of the vertical bar caused by head skews or variations in head recording elements.

The calculating means uses the pattern detecting means to detect the vertical bar at least two positions in a longitudinal
10 direction of the vertical bar to obtain a print position of the vertical bar based on an average value of the detected results. This processing averages pattern position detection errors.

In addition, the device may further comprise means for measuring a unit time interval of the linear scale at a time the
15 pattern elements are detected; and means for correcting a measured value of the timer based on the measured value and a theoretical value of the unit time interval. This configuration eliminates the effect of carriage speed variations when detecting the position within the unit time interval.

20 Preferably, the calculating means calculates the center position of the width of the pattern element based on both edges of the obtained pattern element. This method eliminates the dependency of the position detection result upon the paper types and paper floating.

25 A method according to the present invention, for use on an image forming device with a linear scale provided on a carriage movement path, for detecting a deviation between a print

position actually printed on a print paper by a head and a print target position comprises the steps of providing a timer for detecting a position within a unit interval determined by a resolution of the linear scale; printing a predetermined print
5 element at the target position on the print paper by the head mounted on a carriage that scans in a major scanning direction; detecting the print element with a sensor mounted on the carriage; and detecting a low-resolution position based on the linear scale when the print element is detected and, detecting a
10 high-resolution position within the unit interval with the timer, and obtaining the deviation between the detected position and the print target position.

Brief Description of Drawings

15 FIG. 1 is a diagram showing the main unit of an image forming device in an embodiment of the present invention.

FIG. 2 is a diagram showing the control block in the embodiment of the present invention;

FIG. 3 is a diagram showing a test pattern (print pattern)
20 used in the embodiment of the present invention;

FIG. 4 is a diagram showing the configuration of a sensor used in the embodiment of the present invention;

FIG. 5 is a diagram showing the configuration of a pattern detector used in the embodiment of the present invention;

25 FIG. 6 is a diagram showing a print pattern and the sensor output timing in the embodiment of the present invention;

FIG. 7 is a diagram showing the timing in which a linear

scale output is obtained when an interrupt is received in the embodiment of the present invention;

FIG. 8 is a diagram showing how the sensor output changes when a paper floating occurs in the embodiment of the present invention;

FIG. 9 is a diagram showing an example of print results in the embodiment of the present invention;

FIG. 10 is a diagram showing the internal circuit of a recording head in the embodiment of the present invention;

FIG. 11 is a diagram showing an image formation procedure in the embodiment of the present invention;

FIG. 12 is a diagram showing the configuration of a linear scale and a print timing in the embodiment of the present invention;

FIG. 13 is a flowchart showing an example of registration adjustment after a head is replaced in the embodiment of the present invention;

FIGS. 14(a), 14(b), and 14(c) are diagrams showing print results when a head is deviated in position;

FIG. 15 is a diagram showing a print pattern used to detect a registration deviation in a conventional method;

FIG. 16 is a diagram showing a control circuit used to detect a pattern in the conventional method;

FIG. 17 is a diagram showing a control block in a second embodiment of the present invention;

FIG. 18 is a timing chart showing the second embodiment of the present invention;

FIG. 19 is a diagram showing the internal block of a head control unit in a third embodiment of the present invention;

FIGS. 20(a) and 20(b) are diagrams showing how multi-pass printing is performed in the embodiment shown in FIG. 19;

5 FIGS. 21(a) and 21(b) are diagrams showing the difference in print results between single-pass printing and multi-pass printing in the embodiment shown in FIG. 19;

FIGS. 22(a), 22(b), and 22(c) are diagrams showing a head that is inclined and print results in the embodiment show in
10 FIG. 19;

FIG. 23 is a diagram showing how head manufacturing variations affect the jet of ink;

FIG. 24 is a diagram showing variations in the mounting of a head on a carriage; and

15 FIGS. 25(a), 25(b), and 25(c) are diagrams showing how variations in the mounting of a head on a carriage affect the jet of ink.

Best Mode for Carrying Out the Invention

20 Some embodiments of the present invention will be described more in detail with reference to the drawings.

FIG. 1 is a diagram showing the general configuration of an ink jet image forming device in the form of a serial printer according to the present invention. Black, yellow, magenta, and
25 cyan ink are supplied from the ink tanks to recording heads 101Bk, 101Y, 101M, and 101C each via an ink tube (both not shown). A recording head 101 is driven by a recording head

driver or the like in response to the recording signal corresponding to recording information from a main controller (not shown). This causes ink droplets to be jetted from the recording head 101 onto a print paper 102 for color recording.

5 A sub-scanning motor (a paper conveyance motor) 103, which is a driving source for intermittently feeding the print paper 102, drives a conveyance roller 104 via gears. A main scanning motor 105 is a driving source that causes a carriage 106, with the recording head 101 thereon, to scan in the directions
10 indicated by arrows A and B via a main scanning belt 107.

When the print paper 102 that is fed and conveyed by the conveyance roller 104 reaches a print position, the paper conveyance motor 103 is turned off to stop the conveyance of the print paper 102. Before starting image recording on the print
15 paper 102, the carriage 106 moves to the position of a home position (HP) sensor 108. Then, the carriage scans forward in the direction indicated by arrow A, and jets black, yellow, magenta, and cyan ink from the recording heads 101Bk-101C at predetermined positions to record an image. After recording a
20 specified width (called a band) of an image during one scan operation by the carriage 106, the carriage 106 stops and then starts backward scanning in the direction indicated by arrow B to return to the position of the home position sensor 108. During backward scanning, the paper conveyance motor 103 is
25 driven to convey the print paper 102 by the amount of one band, which was recorded by the heads recording 101Bk-101C, in the direction indicated by arrow C. Repeating the scanning

operation of the carriage 106 (and head 101) and the paper feed operation in this way records an entire image.

A linear scale 109 provided next to, and parallel with, the scanning path of the carriage 106 has slits provided therealong at a predetermined resolution (resolution). A transmission type optical sensor (1203 in FIG. 12) installed near the carriage 106 reads the slits on the linear scale 109 to obtain two signals each with its own phase (90° out of phase). These signals are used to manage the position of the carriage 106 and, at the same time, synchronize the ink jet from the recording head 101.

In this embodiment, a recording head with the resolution of 600 dots/inch and a linear scale with the resolution of 600 dots/inch are used to allow an image to be printed at 600 dots/inch.

Also provided near the carriage 106 in this embodiment is a reflective type optical sensor 110. When any of the recording heads 101 on the carriage 106 cannot form a good image because any of plural recording elements are damaged or ink is not jetted from those elements, the recording head must be replaced. When some of a plurality of recording heads or all of them have been replaced or when the positional relationship among the plurality of recording heads is not correct for some reasons, the images, each formed in a color, are not registered correctly. This is a serious problem because a good image cannot be obtained. Therefore, when a color deviation (registration deviation) occurs at head replacement time or for some reasons, the positions of the recording heads must be

corrected for registration adjustment. To do so, a particular test pattern (print pattern) P is printed to allow the sensor 110 to read it for detecting a registration deviation amount. And, based on the detected registration deviation amount, the registration adjustment is made. The present invention is characterized most in the detection of this registration deviation amount, which will be detailed below.

FIG. 2 is a block diagram showing the configuration of the control hardware of an image forming device in a first embodiment of the present invention. The image forming device shown in the figure, which comprises a print control unit 202 and the heads 101, is connected to an external device 201. The external device 201 -- a computer, an image reader, and some other device -- is a host unit which provide the image forming device with image data or commands required for recording.

Connected to the print control unit 202 are the main scanning linear scale 109, a sub-scanning encoder 210, the main scanning motor 105, sub-scanning motor 103, sensor 110, and an operation panel 111.

The print control unit 202 receives image data VDI from the external device 201 and controls the formation of an image on the print paper with the use of the heads 101. The print control unit 202 comprises a CPU 203, a head control unit 204, a main scanning counter 205, a sub-scanning counter 206, a main scanning timer 207, a sub-scanning timer 208, a pattern detector 209, and a carriage/paper feed servo control unit 211. The CPU 203 provides an interface with the external device 201 from

which the serial image data VDI is transferred and, at the same time, controls the entire operation of the print control unit 202 including the memory and I/O devices.

More specifically, upon receiving the serial image data VDI from the external device 201, the CPU 203 issues a command to the head control unit 204 to temporarily store several bands of image data VDI into the image memory. Image processing is performed for the stored image data VDI, and image data VDO is output as the heads 101 scan. At this time, when controlling the image memory (not shown), the CPU 203 may variably set the horizontal and vertical addresses from which data is to be read. This operation makes it possible to correct the head mounting positions by varying a position from which the image data VDO to be printed by each head is read.

In this embodiment, the main scanning linear scale 109 and the sub-scanning encoder 210 are provided as shown in the figure. Two phase signals are output, each at the absolute position according to the movement amount; that is, when the main scanning linear scale 109 drives the carriage 106 with the main scanning motor 105 and when the sub-scanning encoder 210 feeds paper with the sub-scanning motor 103. The output from the main scanning linear scale 109 is used also as the print control synchronizing signal for outputting the image data VDO and, in synchronization with this signal, the image memory address signal is generated. Therefore, by changing an image memory address from which data is to be read, the registration deviation amount may be corrected on a linear scale basis in the

main scanning direction, and on a head nozzle basis in the sub-scanning direction. Although not shown in the figure, the output of image memory data is delayed for the period of time that is set by the CPU 203 in synchronization with the

5 synchronizing signal sent from the main scanning counter 205. This delay corrects a deviation less than the minimum interval detectable by the main scanning linear scale 109.

The head control unit 204 also generates signals, such as a head block enable signal BE and a heater drive pulse signal HE,
10 necessary for jetting ink. The image data VDO, block enable signal BE, and heater drive pulse signal HE, which are output from the head control unit 204, are transferred to the head 101. In the control circuit in the head 101, only the heaters of the nozzles whose image data VDO and enable signals (indicated by BE
15 and HE) are enabled are turned on. Ink is jetted from those nozzles onto a print paper to form one column of an image as shown in FIG. 11. Repeating this operation by causing the head 101 to scan in the main scanning direction forms a one-band image. Then, the print paper advances a specified amount to
20 form another one-band image. Repeating this control forms the entire image on the print paper.

The carriage/paper feed servo control unit 211 receives the output from the main scanning linear scale 109 and the sub-scanning encoder 210 to feedback-control the drive speed, start,
25 stop, and movement amount of the main scanning motor 105 and the sub-scanning motor 103 for positioning management.

The operation panel 111 is used by the user to issue

operation instructions to the image forming device, including instructions for the print mode, demonstration printing, recording head recovery operation and so on. Instructions in the cases of head replacement and registration deviation

5 correction may also be issued from the operation panel 111.

FIG. 10 shows the internal configuration of the head 101. Note that the figure shows the configuration of only one head. In FIG. 10, numerals 1001 and 1002 are shift registers, numerals 1003 and 1004 are latch circuits, numeral 1005 is a decoder
 10 circuit, and numeral 1006 is an AND circuit. Numeral 1007 is a transistor, and numeral 1008 is a heater.

Image data VDO1 and VDO2 are serial binary data sent from the external device 201 in synchronization with the transfer clock CLK. This serial binary data is sequentially converted
 15 from serial to parallel by the shift registers 1001 and 1002. For each of video data VDO1 and VDO2, eight units of data are transferred and then latched by the LAT signal. In addition, a head composed of a plurality of nozzles is divided into n blocks (in this example, a 256-nozzle head is divided into 16 blocks),
 20 and the enable signal BE0-15 and the heater drive pulse signal HE are supplied, one pulse for each block. The transistor 1007 may be turned on only for the nozzles for which image data is enabled and, when the transistor is turned on, the corresponding heater 1008 is heated for jetting ink.

25 In the image forming device, the decoder 1005 binarizes the enable signal BE from 4 bits to 16 bits. From each nozzle, ink is jetted when the enable signal BE, the bits from the video

data VDO1 and VDO2, and heater drive pulse signal HE are all turned on.

FIG. 13 shows an example of registration adjustment that is made when a registration deviation correction instruction is issued in this embodiment. In most cases, this processing is performed immediately after head replacement. As shown in FIG. 3, each head is used to print the test pattern P composed of horizontal bars HB and vertical bars VB (S11). In FIG. 3, the horizontal bars HB are pattern elements used to detect a vertical registration deviation amount, while the vertical bars VB are pattern elements used to detect a horizontal registration deviation amount. In FIG. 3, only four blocks of pattern elements of the test pattern p for detecting a registration deviation amount, which are printed when the carriage scans in the forward direction, are shown. If there is a difference in the registration deviation amount in the forward direction and that in the backward direction, the pattern elements for use in the backward direction should be provided. Although, in the figure, a plurality of bars are printed at an equal interval in the pattern element block for each color, the bars need not be at an equal interval. This is because, when calculating a registration deviation amount, the deviation amount is calculated by comparing the indicated print position with the actual detection point. In addition, although the print patterns of all heads are shown as the test patterns in FIG. 3, the test patterns of all heads need not always be printed. For example, the print patterns printed only by the replaced head

may be used. Although six pattern elements are shown for each head in the example of the figure, these elements are used only to calculate the average of a plurality of results. In principle, one pattern element is required for each head.

5 As described above, the sensor 110 is provided near the head (FIG. 1). After the test pattern shown in FIG. 3 is printed, the sensor 110 reads each pattern element (S12 in FIG. 3) to detect the deviation amount of the head and to save it as the registration adjustment amount (S13). These steps, S11 -
10 S13, may be performed separately for horizontal bars and vertical bars. These steps may also be repeated for each of the replaced heads (S14).

More specifically, after the horizontal bars HB shown in FIG. 3 are printed, the carriage 106 is moved so that the sensor
15 110 is positioned in the upstream of the patterns. After that, the print paper 102 is conveyed and, based on the output from the sensor 110, the pattern detector 209 in the print control unit 202 detects a position where the pattern density changes. That is, the analog signal from the sensor 110 is binarized and
20 is sent to the interrupt input terminal of the CPU 203 (FIG. 6). The rising edge and the falling edge of the binary signal correspond to the edges of the above-described pattern element. Each time the rising edge and the falling edge are entered to the interrupt input terminal, the CPU 203 reads the values from
25 the sub-scanning counter 206 and the sub-scanning timer 208 and temporarily stores data in the work memory.

After reading all horizontal bars HB, the vertical bars VB

are printed. After printing the vertical bars VB, the print paper 102 is moved so that the sensor 110 is positioned on the vertical bars VB. After that, the carriage 106 scans and, based on the output from the sensor 110, the pattern detector 209 in
 5 the print control unit 202 detects a position where the pattern density changes. At the same time, the analog signal from the sensor 110 is binarized and is sent to the interrupt input terminal of the CPU 203. As described above, each time the interrupt terminal receives the rising edge and the falling
 10 edge, the CPU 203 reads the values from the main scanning counter 205 and the main scanning timer 207 and temporarily stores data in the work memory. After reading all vertical bars VB, the CPU 203 starts calculating the registration deviation amount.

15 The order in which the horizontal bars HB and vertical bars VB are processed may be the reverse of the above.

FIG. 4 is a diagram showing the internal configuration of the sensor 110 used in the image forming device. In the figure, numeral 401 denotes a light-receiving element -- either a
 20 phototransistor or a photo diode -- that has a band (or optical filter) covering the frequency of ink colors. Numeral 402 denotes a light-emitting element for emitting one of R, G, and B that are complementary colors of C, M, and Y. Numeral 403 denotes an optical lens that focuses light, emitted by the
 25 light-emitting element 402, on the registration deviation detection pattern P and, with the optical lens, condenses the reflected light on the light receiving element 401 to detect the

presence of pattern elements. In this embodiment, the ink colors C, M, Y, and K are used, and the light emitting element that emits R, G, and B independently is used for identifying each ink color and the white of the background paper to allow
 5 the emission light to be switched according to the ink color.

The output from the sensor 110 is used by the pattern detector 209 in the print control unit 202 to detect a change in the density of a pattern. FIG. 5 shows the details of the pattern detector 209.

10 In FIG. 5, numeral 501 is a light-emitting element driving transistor, numeral 502 is an I-E amplifier that amplifies the current generated in the light-receiving element and converts the current to a voltage, and numeral 503 is an amplifier that further amplifies the output of the I-E amplifier 502. Numeral
 15 504 is a comparator that converts the output of the amplifier 503 to a binary value, and numeral 505 is a D/A converter through which the CPU 203 sets the adjustment values to adjust the light emission amount of the light-emitting element in the sensor 110 and the offset amount of the sensor 110. The output
 20 of the amplifier 502 is connected also to the analog-digital conversion input terminal of the CPU 203. To keep the sensor output at a predetermined level before detecting a registration deviation adjustment pattern, the CPU 203 uses this output to adjust the light emission amount of the light emission element
 25 in the sensor 110 and the offset of the output from the sensor 110. After adjusting the sensors, the registration deviation adjustment pattern is read to detect the pattern. In addition,

the output of the comparator 504 is connected to the interrupt input terminal of the CPU 203. Each time the rising edge or the falling edge of a binary output from the comparator 504 is entered, the CPU 203 reads the values of the main scanning counter 205 and the main scanning timer 207 to detect a horizontal registration deviation, or the values of the sub-scanning counter 206 and the sub-scanning timer 208 to detect a vertical registration deviation, temporarily stores the data in the work memory and, after reading those values, calculates the registration deviation amount.

FIG. 7 shows the relationship between the interrupt input and the main scanning linear scale when detecting a registration deviation amount in the main scanning direction in this embodiment. As shown in the figure, two phase signals, phase A and phase B, are output from the main scanning linear scale 109 as the carriage 106 moves. The main scanning counter 205 counts the rising and falling edges of phase A/phase B to measure the movement position of the carriage to the extent of the resolution provided with the linear scale 109. Within the time interval between the rising edge and the falling edge of phase A and phase B, the main scanning timer 207 counts shorter-period reference clocks at a predetermined interval to detect the carriage position more finely than it is detected by the main scanning linear scale 109. When an interrupt is sent from the sensor 110 to the CPU 203 at time T while the carriage scan is performed to detect a registration deviation amount, the CPU 203 references the count values of the main scanning counter 205 and

the main scanning timer 207 to detect, at a high resolution, the carriage position where the pattern element is detected. To do so, the timer 207 is initialized each time the counting starts. It is desirable that the carriage be driven at a constant speed
5 to minimize the timer measurement error.

If the position of the pattern element was detected only by the main scanning counter 205 that counts the linear scale output, the resolution would depend only on the resolution of the linear scale 109 and, therefore, the registration deviation
10 amount could not be detected precisely. In addition, if the signal was simply sampled in a predetermined timing with the use of the timer as in a conventional device, the mechanical variations would accumulate as described above. Therefore, to detect the position of the pattern element, the device according
15 to the present invention uses the main scanning counter 205 to detect the general absolute position of the pattern and, at the same time, the timer to measure the correct position at a resolution higher than the minimum unit interval of the linear scale. This configuration minimizes the effect of carriage
20 speed variations and, at the same time, detects the position at a higher resolution.

As described above, unlike the device in the prior art that has a configuration in which the timer is used to measure the distance between the pattern elements printed by the base head
25 and the pattern printed by some other head (configuration in which the amount of deviation of the other head with respect to the base head is detected --- relative position comparison), the

device according to the present invention has a configuration in which the head deviation amount is detected based on the dot position to be printed according to the linear scale and the dot position actually printed (absolute position comparison). This
5 configuration requires only one scanning to detect the center dot position. Therefore, the error is not doubled and the detection error may be minimized.

In addition, although a pair of pattern elements in different colors must always be arranged in parallel for the
10 base head and the comparison head in print pattern for use in relative position comparison, the present invention eliminates this limitation on the print pattern configuration. In addition, when replacing a recording head, the device according to the present invention prints the pattern elements only for
15 the replaced head for detecting the head deviation amount. In relative position comparison, even when only one non-black ink head has been replaced, a pair of black pattern elements and a pair of a black pattern element and a pattern element in the color of the replaced head must be printed. In particular, when
20 replacing the black ink head, the print pattern must be printed for the heads for all ink colors and the deviation amount must be detected for each of the non-black ink heads (Normally, monochrome printing is dominant and, therefore, the black ink head is replaced more frequently than other heads.)

25 After reading the pattern, the CPU 203 reads data from the work memory and, based on the carriage position values for the rising edge and the falling edge, calculates the center dot

position of each pattern. As shown in "state 1" and "state 2" in FIG. 8, the sensor output level slightly changes depending upon the paper type, paper floating, sensor accuracy, and light absorption ratio of a color. Therefore, when the comparator 504

5 binarizes the signal using a fixed threshold, there might be variations in the rising edge positions and falling edge positions in certain cases. To solve this problem, the center position is calculated based on both edge positions. This calculation method always gives a reliable output result because

10 the center position remains unchanged in most cases even when there are variations described above. After that, the difference between the center dot position (indicated value) of each pattern element to be printed and the actual measurement value is calculated. In the example in the above test pattern,

15 the deviation amounts at the center dot positions of a plurality of parallel bars for each color are calculated and then averaged. The registration deviation amount may be calculated from the head position difference obtained in this way.

An example of a difference in the registration deviation

20 amount will be described with reference to FIG. 9. In the figure, the white circle "○" indicates a dot position at which a dot is to be printed, with the range indicated by the main scanning linear scale count values 16 hex to 1C hex. The black circle "●" indicates that the actual print position has been

25 shifted in the range 17 hex to 1D hex. The center dot position of the pattern element to be printed is 19 hex while the center dot position of the pattern element whose print has been shifted

because of a registration deviation is 1A hex. As a result, a one-dot registration deviation is generated. Although a position deviation less than one dot in size may actually occur, a one-dot deviation will be described in the description below
 5 for convenience.

Performing the operation described above for the pattern (HB) for detecting a vertical registration deviation and for the pattern (VB) for detecting a horizontal registration deviation detects a vertical/horizontal head mount deviation.

10 To correct the ink jet positions of each head based on the head registration deviation amount that was detected as described above, the CPU 203 variably changes the address from which, and the timing in which, data is to be read from the image memory in the head control unit 204. In the main scanning
 15 direction, the jet positions may be corrected at a resolution more than the resolution (less than the minimum unit interval) of the main scanning linear scale 109. In the sub-scanning direction, the jet position may be corrected on a nozzle basis of the head 101.

20 Although the correction in the sub-scanning direction may be made only on a nozzle basis in this embodiment, the sub-scanning timer 208 is used to find a registration deviation amount in the sub-scanning direction with a resolution equal to or greater than the resolution of the sub-scanning encoder 210.
 25 The reason is that, when a decimal fraction is generated during the detection and calculation of a registration deviation amount in the sub-scanning direction, which nozzle, top or bottom, will

minimize the registration deviation amount must be decided. Therefore, the sub-scanning timer 208 in the sub-scanning direction need not be so precise as the timer in the main scanning direction.

5 In the embodiment described above, a method for detecting a vertical/horizontal registration deviation in a single detection operation has been described. However, a single detection operation sometimes results in the detection result changing each time the deviation is detected because of variations in the
10 sensor output signal level determined by the precision of the sensor 110, variations in linear scales introduced during manufacturing, and variations in the carriage speed. This problem may be solved by increasing the number of detections or patterns and by calculating its average.

15 Next, a second embodiment of the present invention will be described. FIG. 17 shows the configuration of an image forming device in this embodiment. The configuration in this figure is almost similar to that shown in FIG. 2 except that a second interrupt generator 212 is added. As shown in the timing chart
20 in FIG. 18, the second interrupt generator 212 sends the second interrupt signal to the CPU 203 when the timing signal is issued from the main scanning linear scale 109 immediately after the pattern detector 209 sends the interrupt signal (first interrupt) to the CPU 203. This second interrupt allows the CPU
25 203 to know the timer value T1 of the main scanning timer 207 at that moment. In this embodiment, the timer value in the main scanning timer 207 is reset immediately after the timer value T1

is identified. The measured timer value T1 may be different from the theoretical value T0, calculated from the predetermined speed, depending upon the variation in the carriage speed. The figure shows a case in which the actual carriage speed is slightly higher than the predetermined speed. Therefore, the timer value t measured based on the first interrupt, which is affected by the variation in the speed, is thought to be different from the theoretical value (in this example, the value is smaller). To correct the value affected by the variation in the speed, the timer correction value tc (theoretical value) is calculated by the following formula:

$$tc = (t/T1) \times T0$$

This adjustment also makes it possible to eliminate the effect of variation in the carriage speed within the minimum unit interval determined according to the linear scale resolution for the position where the pattern element is detected.

Next, a third embodiment of the present invention will be described. The configuration of an image forming device in this embodiment is similar to that shown in FIGS 1 and 2 except the internal configuration and operation of the head control unit 204.

FIG. 19 shows an example of the internal configuration of the head control unit 204. The head control unit 204 generally comprises an image memory 301, an image memory control unit 302, a mask memory 303, a mask control unit 304, and a heater drive signal generator 305.

The image memory control unit 302 performs memory control as follows. That is, it temporarily stores into the image memory 301 several bands of serial image data VDI transferred from the external device 201 as described above and, as the head 101 scans, it outputs the stored image data to the head 101 as the image data VDO. When storing the image data VDI into the image memory 301, the unit generates the memory address signal in synchronization with the timing in which data is transferred from the external device 201 and sequentially stores the image data VD. When outputting the image data from the memory as the head 101 scans, the unit generates the memory address signal in synchronization with the synchronizing signal output from the main scanning counter 205 that counts the output from the main scanning linear scale 109 and outputs the image data VD from the memory.

The mask control unit 304 thins out a predetermined amount of data from the image data to smooth an image density unevenness generated by the variations in the nozzle shape and direction introduced during recording head manufacturing so that the control unit causes the same band to be scanned several times to print an image with the 100% of duty (This print method is generally called multi-pass recording).

An example of multi-pass recording will be described with reference to FIGS. 20(a) and 20(b), in which, for simplicity, a single ink color head composed of 16 nozzles is shown. In the first scan, the dots of pattern A are recorded. "●" indicates a dot that is recorded in this scan. Then, after the paper is fed

1/4 (four dots wide) of the head recording width (band) in the paper conveyance direction, the dots "●" of pattern B are recorded in the second scan. In the figure, "○" indicates a dot that has already been recorded. In the third scan, the dots "●" of pattern C are recorded and, finally, the dots "●" of pattern D are recorded in the fourth scan. This sequential processing completes recording. That is, by feeding paper four dots at a time and sequentially recording patterns A-D, a four-dot recording area is completed in each of four scans. This recording method differs from one-time scan (single-pass) recording method in that a four-dot recording area is sequentially recorded using four nozzles, at a time, that are in different portions of a head. This method ensures a high-quality image with little or no unevenness. The multi-pass recording method also has an advantage that an image is recorded while drying it.

There are several methods for generating pass data for each scan. For example, pass data is generated by using a fixed mask pattern to thin out recording data as described above (called fixed thinning-out), by using a random mask pattern where recording dots and non-recording dots are randomly arranged to thin out recording data (called random thinning-out), or by thinning out recording dots according to the data (called data thinning-out).

To achieve multi-pass recording described above, the mask control unit 304 thins out a predetermined amount of data from

image data VD output from the image memory control unit 302. A mask pattern is written in the mask memory 303 by the CPU before data is printed, and is read from the mask memory 303 in synchronization with the image data VD output from the image memory control unit 302 when the data is printed. Only the data corresponding to a portion where both the mask pattern and the print data are ON is output to the head 101 as the output data VDO.

As described above, the heater drive signal generator 305 generates the signal that selects which block in the head to drive (block enable signal (BE0-3)) and the heater drive pulse signal HE in synchronization with the synchronizing signal output from the main scanning counter 205 that counts the output of the main scanning linear scale 109. From the head 101, ink is jetted from only the nozzles where the block enable signal BE0-3, the heater drive pulse signal HE, and the image data VDO are all enabled.

Although the test pattern used in the third embodiment looks externally the same as that shown in FIG. 3, the vertical bar VB is printed in multiple passes in the multi-pass recording method described above. FIG. 21(b) shows the print result. FIG. 21(a) shows the print result produced by printing the vertical bar pattern in a single pass (the pattern is formed in the single pass of the carriage with no data thinned out with the use of a mask), as in the conventional method, using a head mounted with skew on the carriage. In this case, the print result directly reflects the head skew. On the other hand, FIG.

21(b) shows the result produced by printing the vertical bar in four passes according to the mask method described above.

Although the print result in FIG. 21(b) may look more uneven, the uneven printing in the print result in FIG. 21(b) can be

5 averaged more easily, considering the variation in the shape or direction of the nozzles produced during recording head manufacturing. (To illustrate the edge errors of pattern elements for detecting a registration deviation amount, the figure shows only a print result produced when the head is
10 mounted with skew). When the read range of the sensor in the sub-scanning direction is four dots, a serious error would be generated in FIG. 21(a) in the bar edge detection positions if the positions at which the pattern is read differ largely in the longitudinal direction of the bar. For example, there is an
15 error E between position A and position B. On the other hand, in multi-pass printing in FIG. 21(b), such an error is not generated or extremely slight if generated.

For example, as shown in FIG. 22(a), consider that head C is inclined toward the right and head K is inclined toward the
20 left and that the sensor is installed on the carriage such that the sensor senses the bottom area of the pattern. If a registration deviation is detected and corrected in this situation in the conventional method, the corrected result is as shown in FIG. 22(b) in which dots in the top of the pattern
25 overlap each other and the error E is generated in the bottom of the pattern. On the other hand, if the pattern elements of the vertical bar are printed in multiple passes by the device

according to the present invention, the corrected result is as shown in FIG. 22(c) in which the patterns overlap at the center and the maximum error of up to $E/2$ is detected at the top and the bottom. The more passes of multi-pass printing, the better
5 the result.

It is desirable that the vertical bar VB be scanned repeatedly at two or more positions as in positions A, B, and C in FIG. 21 (three positions in this embodiment) and that the values that have been read be averaged. The reason is as
10 follows. Even when printing in multiple passes, a slight error is generated in the read positions because of the vertical direction variations or twists in the nozzles or an error in the paper feed amount. To further smooth the errors, multiple read operations may be performed while changing the read position in
15 the longitudinal direction of the bar, to minimize the error.

While preferred embodiments of the present invention have been described, such description is illustrative purposes only and not restrictive, and it is to be understood that changes and variations may be made without departing from the scope of the
20 claims of the present invention.

Industrial Applicability

The present invention provides an image forming device capable of precisely detecting a head deviation when the head
25 has been replaced. The device minimizes a detection error that may be generated because of variation in the movement speed of the carriage or a print paper, allowing a head registration

deviation to be detected precisely. Because a pattern may be detected in a single scan of a test pattern in principle, the time to detect an error in the head mounting position may be reduced.

- 5 In addition, a vertical bar pattern is printed in multiple passes, the pattern is detected repeatedly in two or more positions, and the detection results are averaged to calculate a registration deviation amount. This method further reduces the effect of variation in the shape and direction of nozzles
- 10 introduced during head manufacturing, head mounting skews, and variation in the installation of the sensor on the carriage.

CLAIMS

1. An image forming device that forms an image on a print
paper in an ink jet recording method with a plurality of heads,
5 comprising:

main scanning direction moving means for moving a carriage
in a main scanning direction, said carriage having said
plurality of heads mounted thereon;

paper conveying means for conveying the print paper in a
10 sub-scanning direction;

pattern printing means for printing, with at least one
head, a test pattern including predetermined pattern elements;

pattern detecting means, mounted on said carriage, for
detecting the pattern elements of the test pattern printed on
15 the print paper by said printing means;

binary conversion means for binarizing an output of said
pattern detecting means;

position detecting means for detecting a position of the
carriage in said main scanning direction; and

20 calculating means for moving said carriage to detect the
pattern elements of the test pattern with said pattern detecting
means, for detecting a print position of the pattern elements
based on a detection result of said position detecting means
when a rising and/or falling edge of a binary signal obtained by
25 said binary conversion means is generated, and for calculating a
mounting deviation amount of each head in said major scanning
direction,

wherein said position detecting means comprises low-resolution position detecting means based on a linear scale provided on a movement path of said carriage and high-resolution position detecting means for detecting a position more finely than a
5 minimum unit determined by a resolution of said low-resolution position detecting means.

2. The image forming device according to claim 1 wherein, for each head, said test pattern is at least one vertical bar
10 extending in the sub-scanning direction almost perpendicular to said main scanning direction.

3. The image forming device according to claim 1, wherein said test pattern includes, for each head and as a pattern
15 element, at least one horizontal bar extending almost in parallel with said main scanning direction, further comprising:

conveyance amount detecting means for detecting a conveyance amount of the print paper in the sub-scanning direction almost perpendicular to said main scanning direction;
20 and

measuring means for measuring the conveyance amount equal to or smaller than a minimum unit determined by a resolution of said conveyance amount detecting means,

wherein said calculating means moves the print paper, on
25 which the test pattern is printed, with the use of said paper conveying means with respect to the carriage to detect the pattern elements of the test pattern with said pattern detecting

means, detects the print position of the pattern elements based on the detection results of said conveyance amount detecting means and said measuring means when a rising and/or falling edge of the binary signal obtained by said binary conversion means is
5 generated, and calculates an amount of mounting deviation of each head in said sub-scanning direction based on the print position of the pattern elements printed by each head.

4. The image forming device according to one of claims 1-3
10 wherein said pattern detecting means is a reflective sensor comprising a light emitting element and a light receiving element.

5. The image forming device according to claim 1 or 2
15 wherein said low-resolution position detecting means comprises a counter for counting a timing signal based on said linear scale and wherein said high-resolution position detecting means comprises a timer which is initialized by said timing signal and measures a time with a predetermined clock signal.

20

6. The image forming device according to claim 2 wherein said pattern printing means causes each of different portions of a single head to print a plurality of dots sequentially in a plurality of passes, said plurality of dots constituting a
25 portion of said vertical bar.

7. The image forming device according to claim 1 or 6

wherein said calculating means uses said pattern detecting means to detect the vertical bar at least two positions in a longitudinal direction of said vertical bar to obtain a print position of said vertical bar based on an average value of the
5 detected results.

8. The image forming device according to claim 5, further comprising:

means for measuring a unit time interval of said linear
10 scale at a time said pattern elements are detected; and

means for correcting a measured value of said timer based on the measured value and a theoretical value of said unit time interval.

15 9. An image forming device that forms an image on a print paper in an ink jet recording method with a plurality of heads, comprising:

main scanning direction moving means for moving a carriage in a main scanning direction, said carriage having said
20 plurality of heads mounted thereon;

paper conveying means for conveying the print paper in a sub-scanning direction;

pattern printing means for printing, with at least one head, a test pattern including predetermined pattern elements;

25 pattern detecting means, mounted on said carriage, for detecting the pattern elements of the test pattern printed on the print paper by said printing means;

binary conversion means for binarizing an output of said pattern detecting means;

position detecting means for detecting a position of the carriage in said main scanning direction; and

5 calculating means for moving said carriage to detect the pattern elements of the test pattern with said pattern detecting means, for detecting a print position of the pattern elements based on a detection result of said position detecting means when a rising and/or falling edge of a binary signal obtained by
10 said binary conversion means is generated, and for calculating a mounting deviation amount of each head in said major scanning direction,

wherein, for each head, said test pattern includes as a pattern element at least one vertical bar extending in the sub-
15 scanning direction almost perpendicular to said main scanning direction, and

wherein said pattern printing means divides said vertical bar into a plurality of portions and causes each of different portions of a single head to print a plurality of dots
20 sequentially in a plurality of passes, said plurality of dots constituting a portion of said vertical bar.

10. The image forming device according to claim 1 or 9 wherein, based on both edges of an obtained pattern element,
25 said calculating means calculates a center position of a width of the pattern element.

11. A method, for use on an image forming device with a linear scale provided on a carriage movement path, for detecting a deviation between a print position actually printed on a print paper by a head and a print target position, said method

5 comprising the steps of:

providing a timer for detecting a position within a unit interval determined by a resolution of said linear scale;

printing a predetermined print element at the target position on the print paper by the head mounted on a carriage
10 that scans in a major scanning direction;


detecting said print element with a sensor mounted on said carriage; and

detecting a low-resolution position based on said linear scale when the print element is detected and, detecting a high-
15 resolution position within the unit interval with said timer, and obtaining the deviation between the detected position and said print target position.

12. The method according to claim 11, further comprising
20 the step of correcting the high-resolution position within the unit interval, which was detected by said timer, based on an actual measurement value measured in a minimum unit interval of said linear scale and a theoretical value thereof.


1/22

FIG. 1

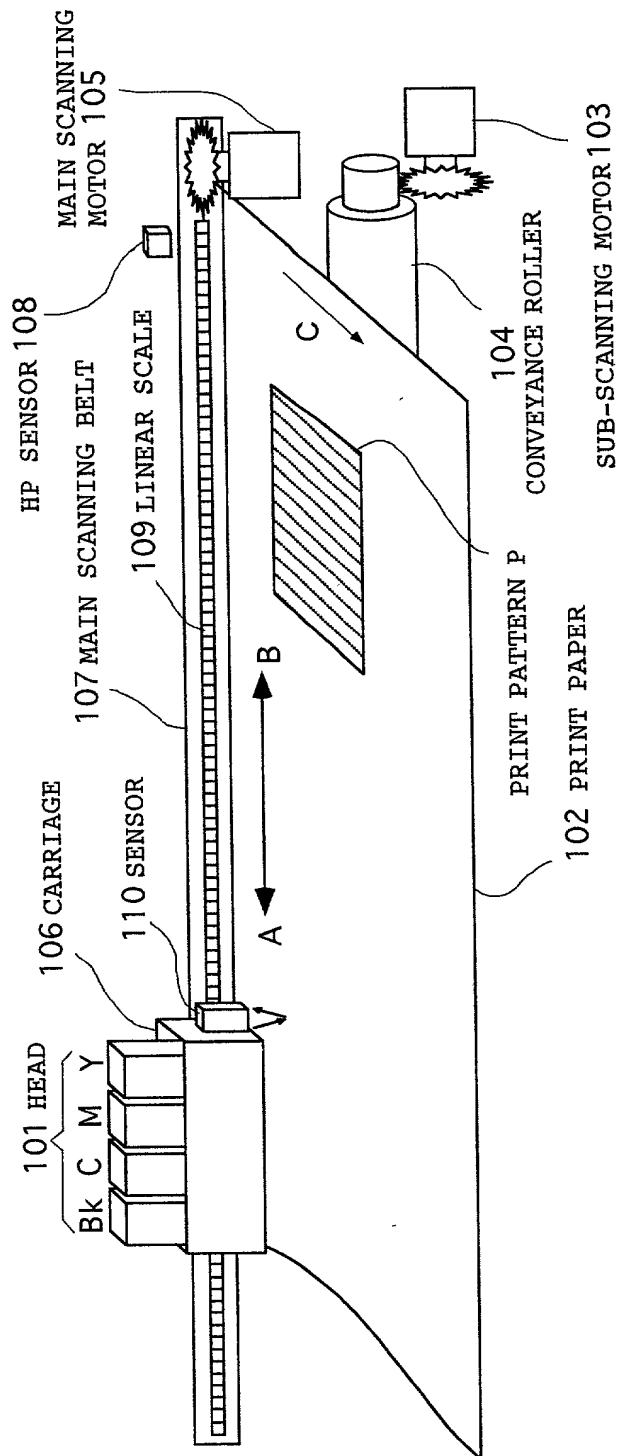

2/22

FIG. 2

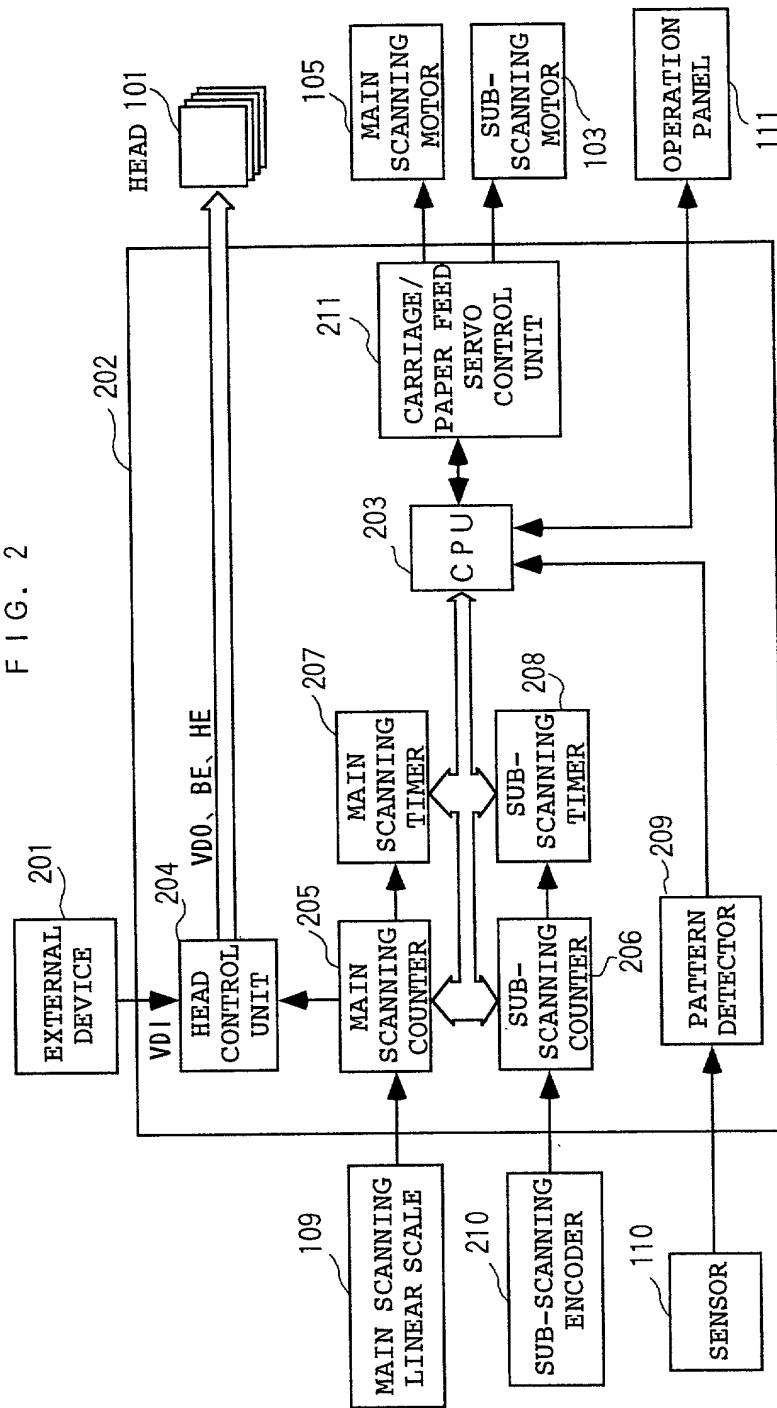

3/22

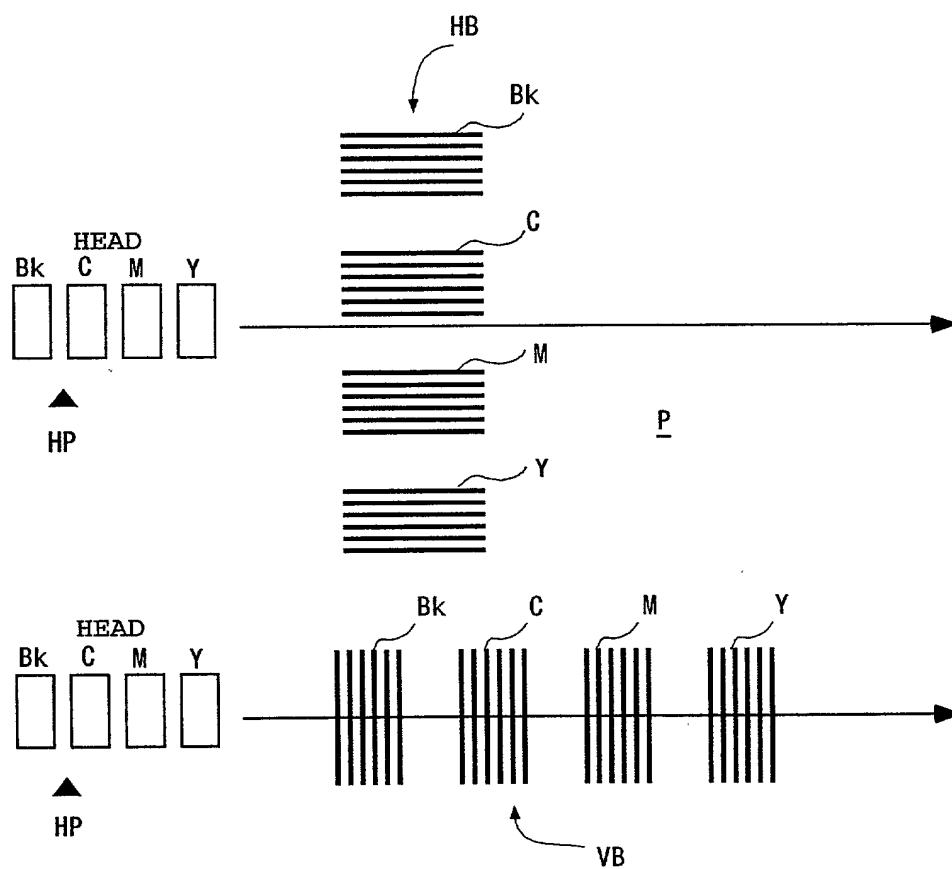


FIG. 3

4/22


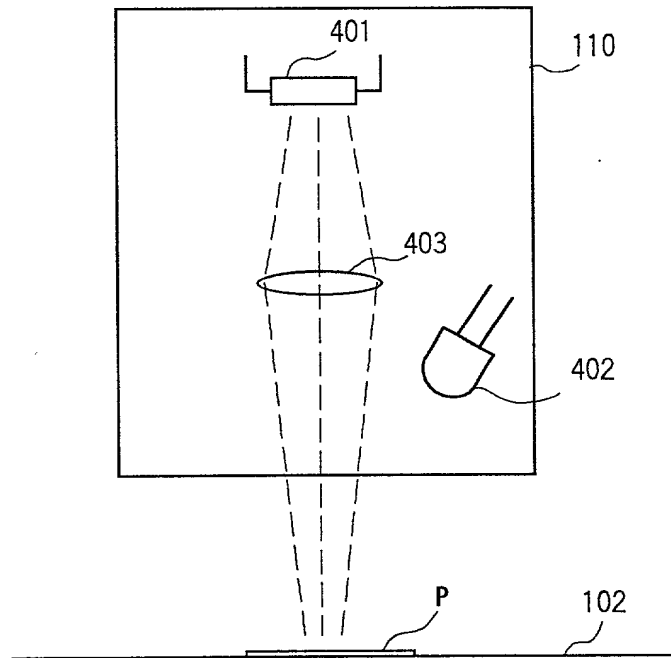


FIG. 4

5/22

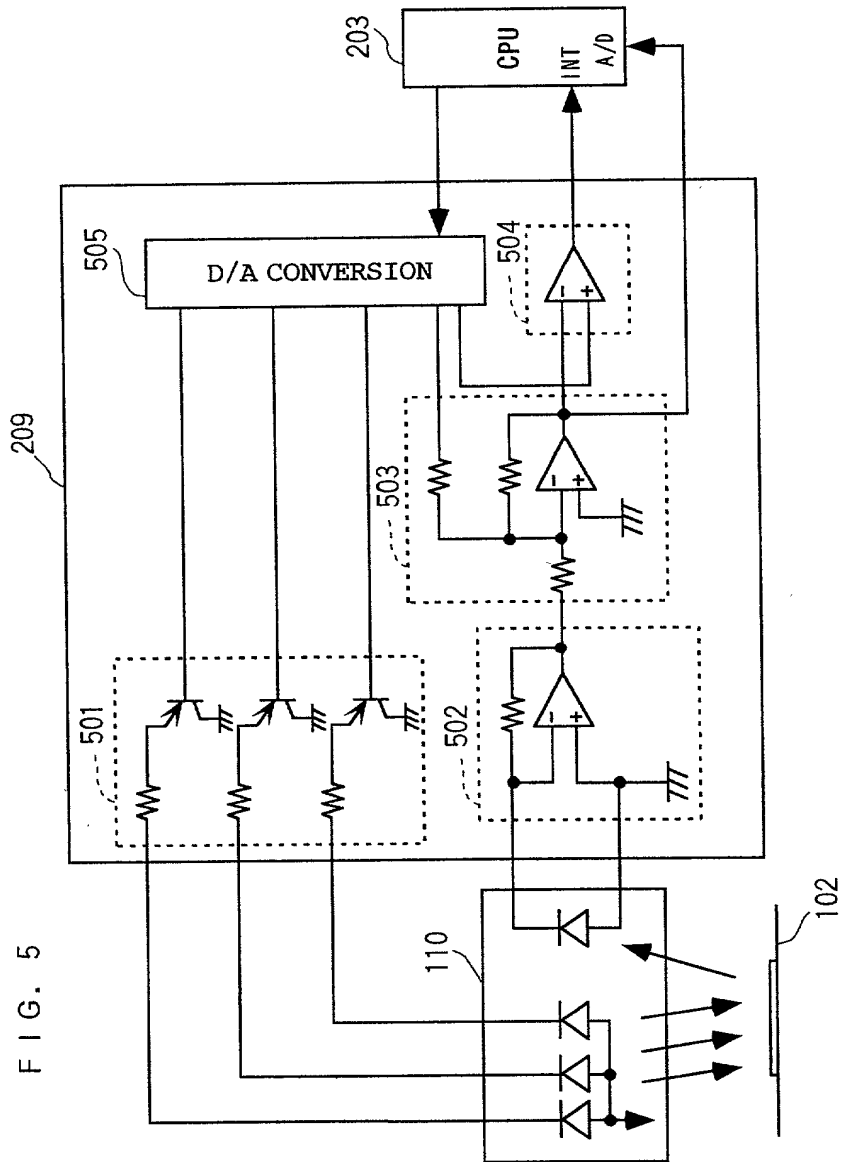

6/22


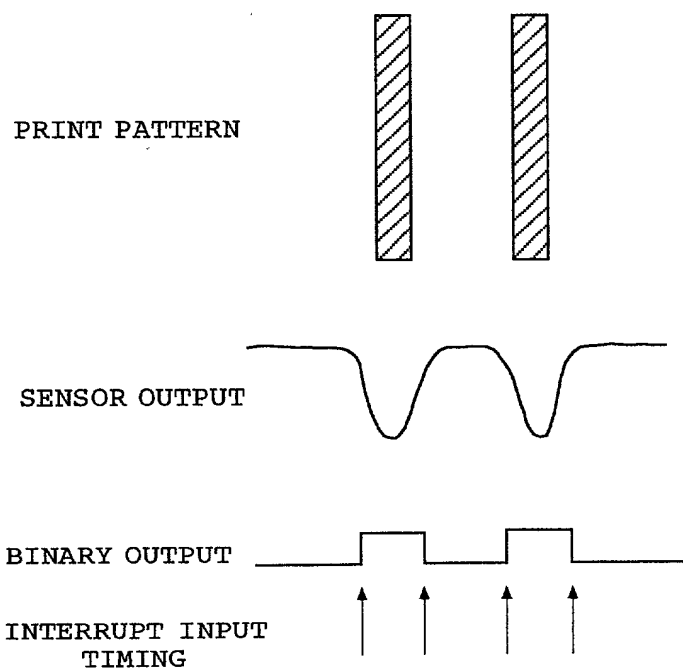


FIG. 6

7/22


FIG. 7

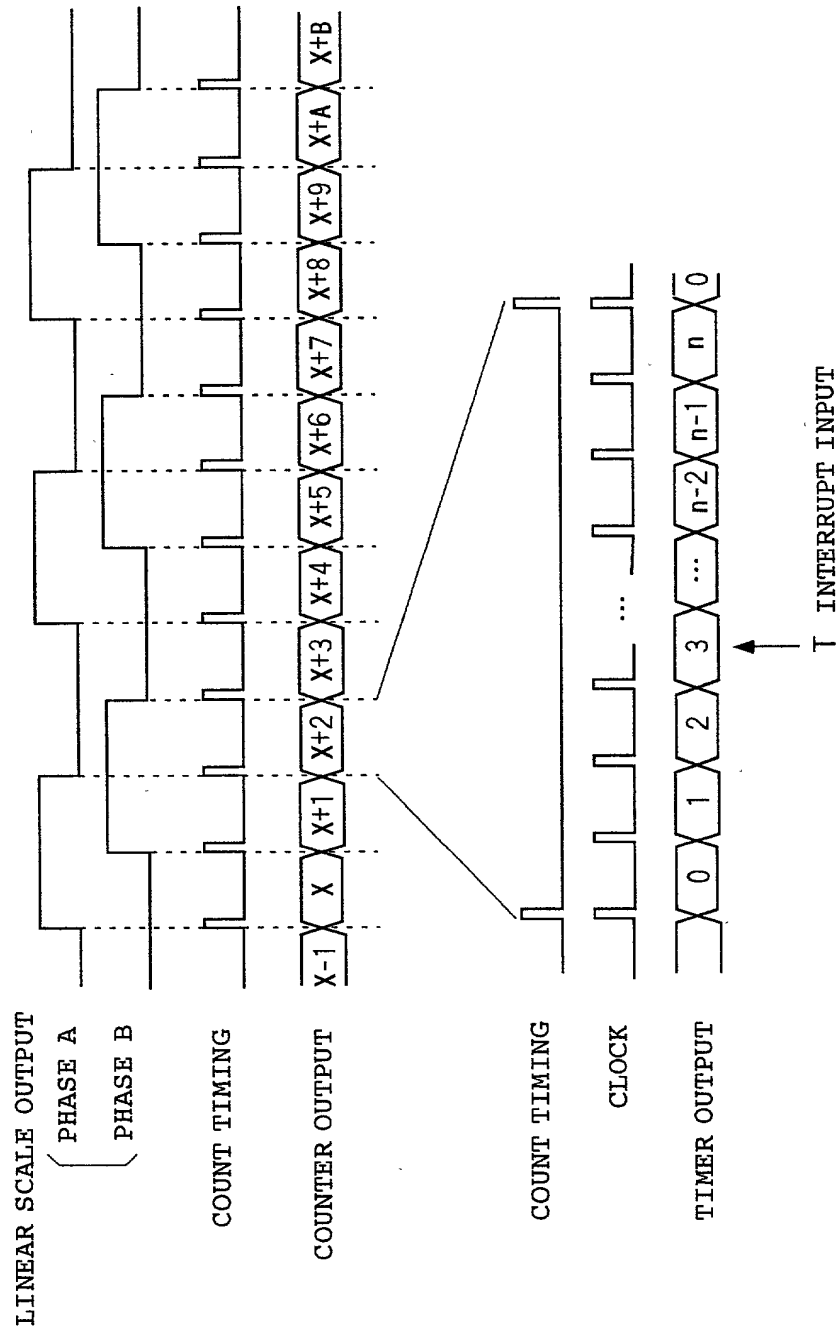

[illegible]


9/22

FIG. 9

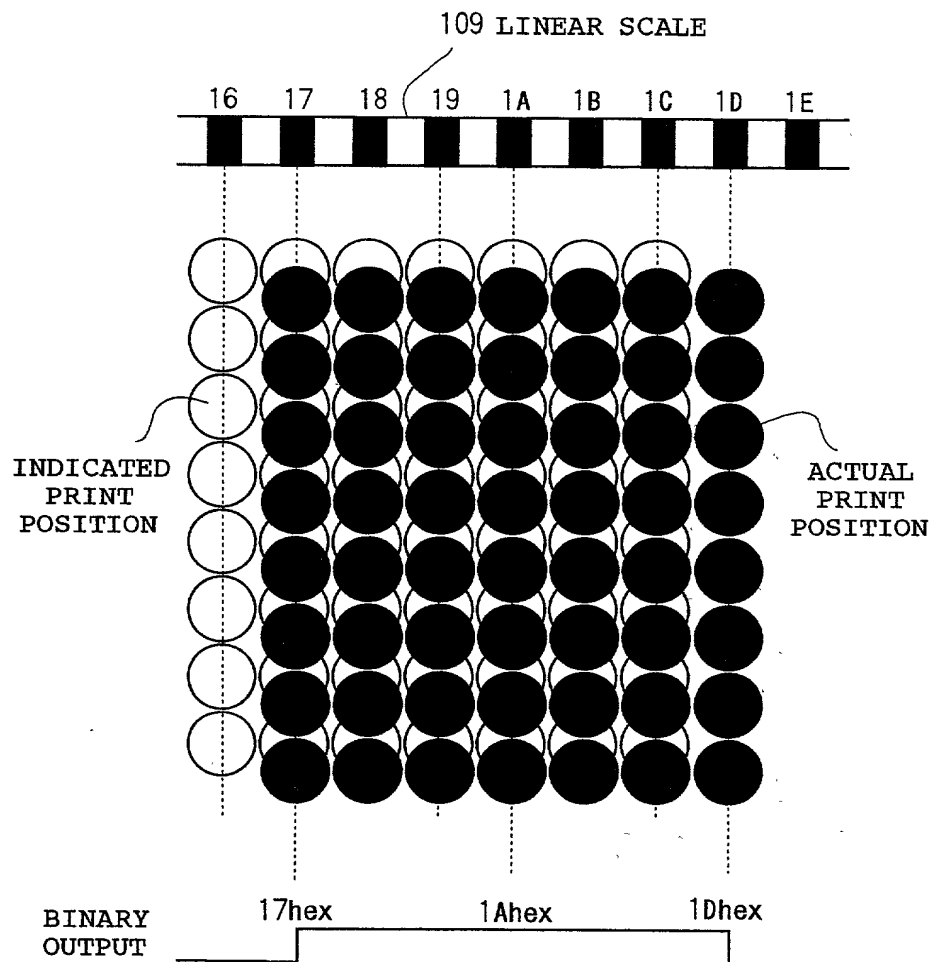

10/22

FIG. 10

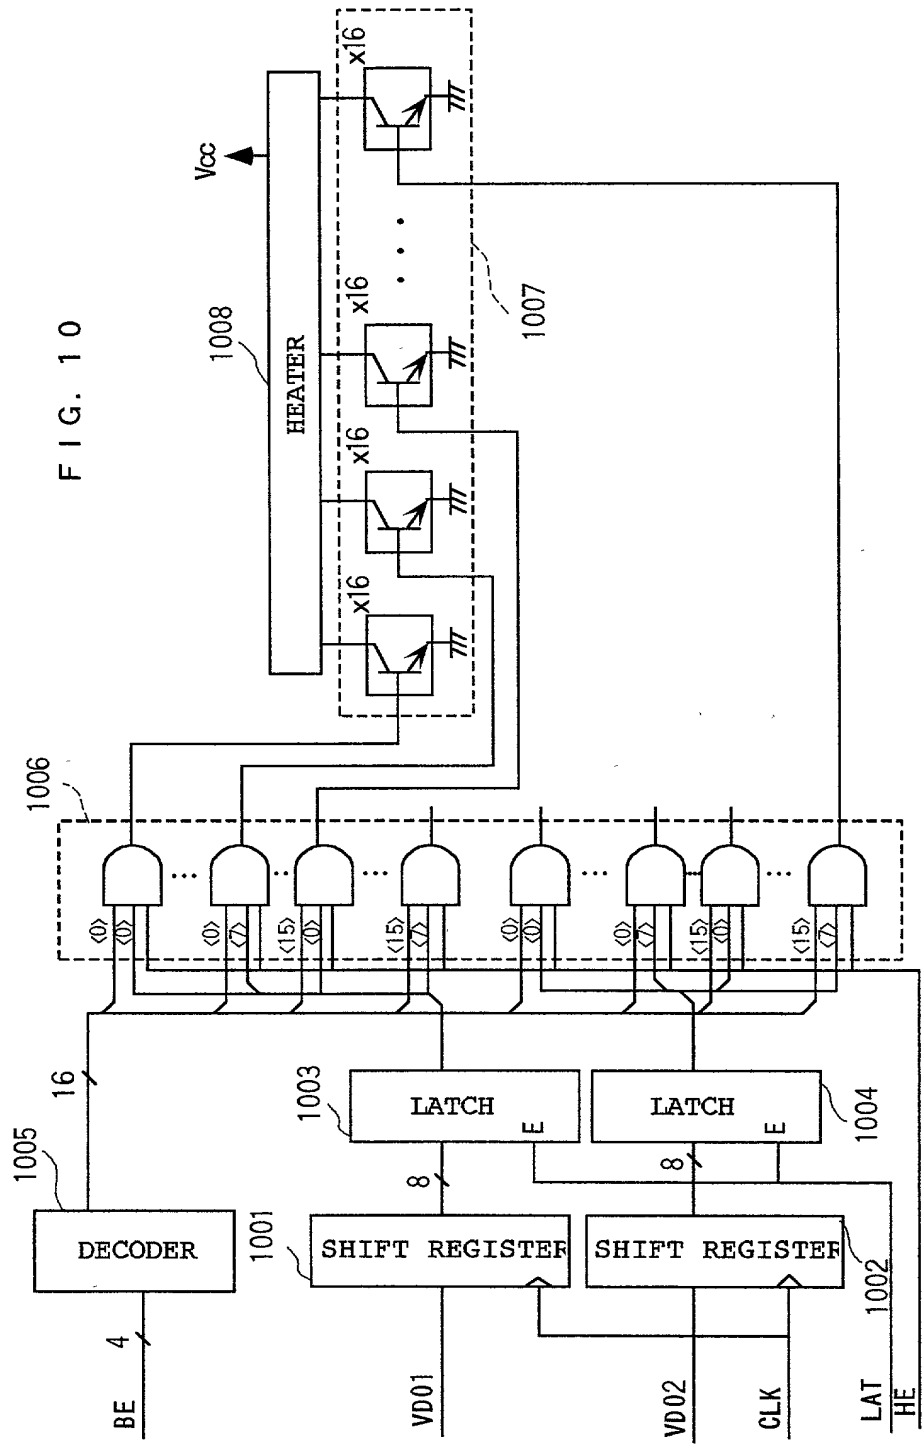

11/22

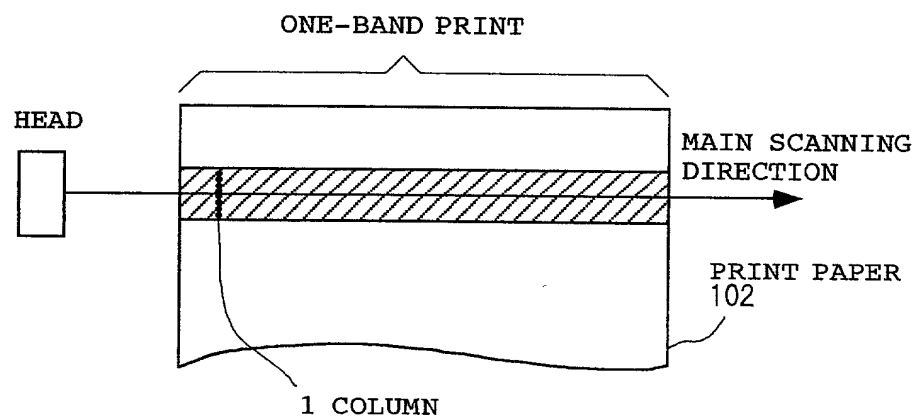


FIG. 11


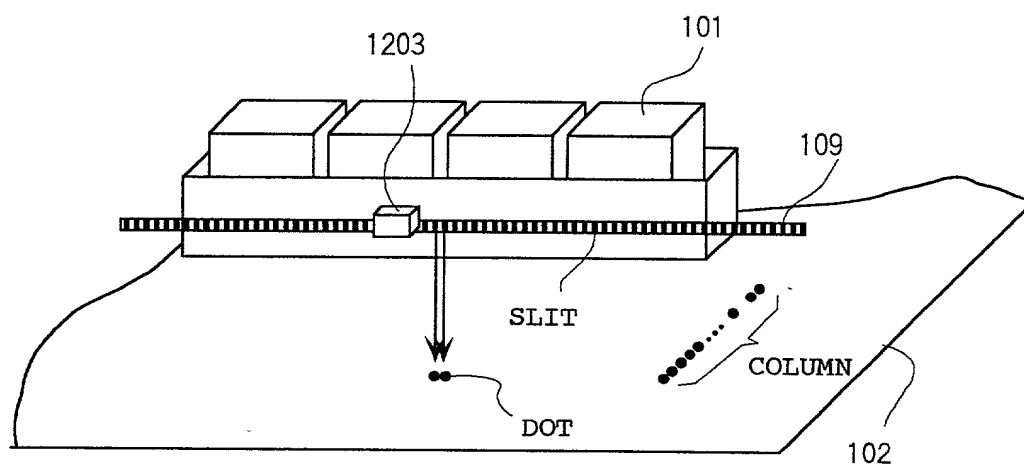


FIG. 12

12/22

FIG. 13

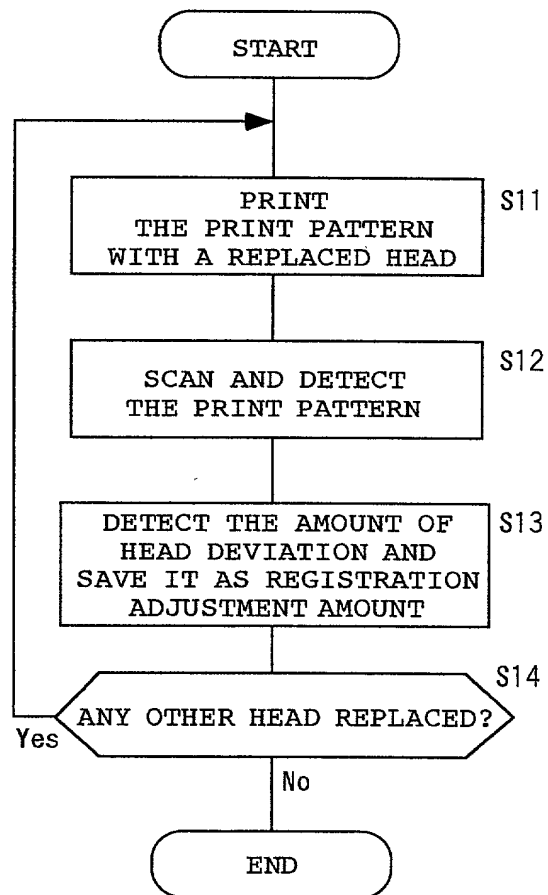

13/22

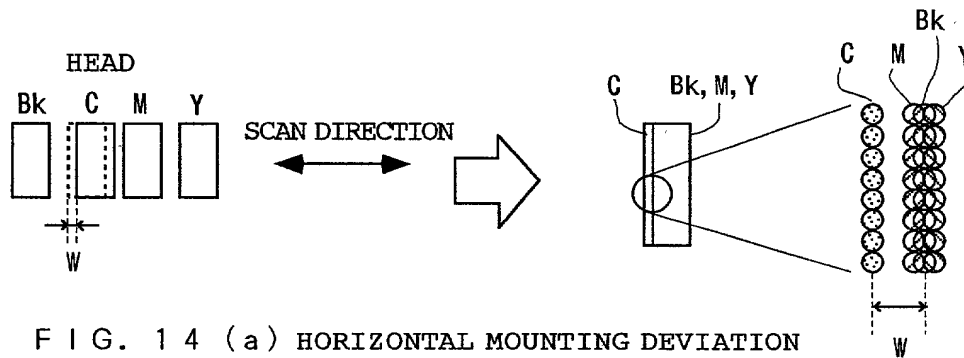


FIG. 14 (a) HORIZONTAL MOUNTING DEVIATION

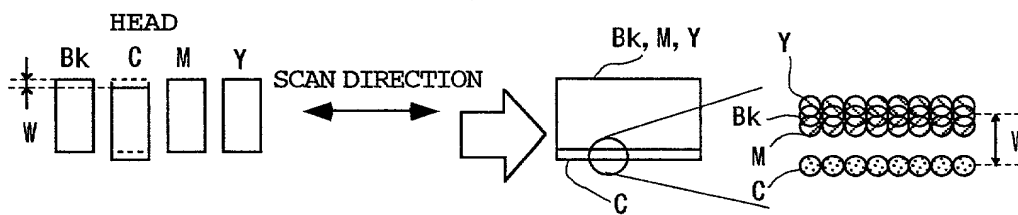


FIG. 14 (b) VERTICAL MOUNTING DEVIATION

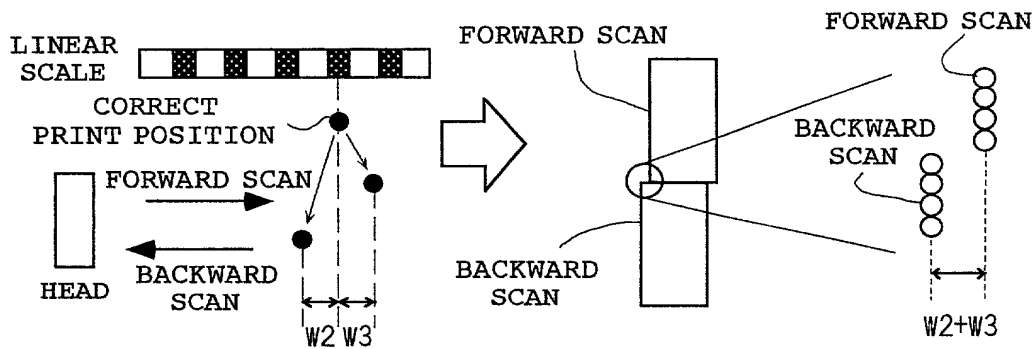


FIG. 14 (c) FORWARD/BACKWARD PRINT DEVIATION

14/22

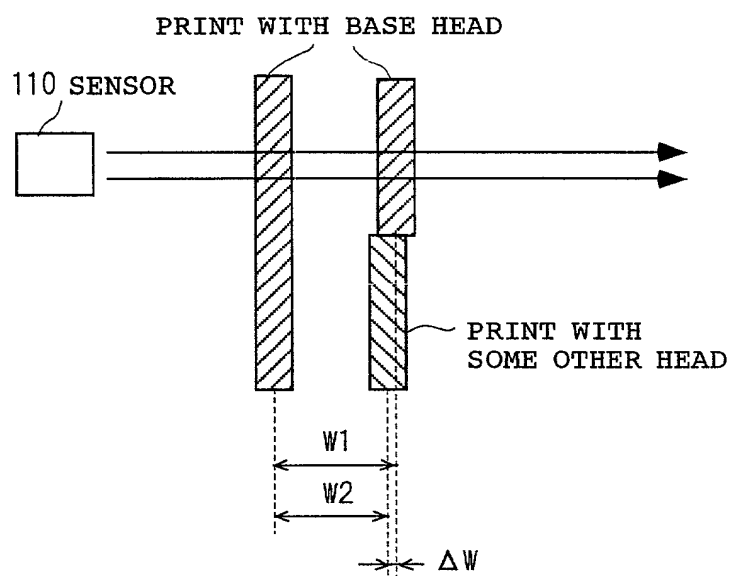


FIG. 15


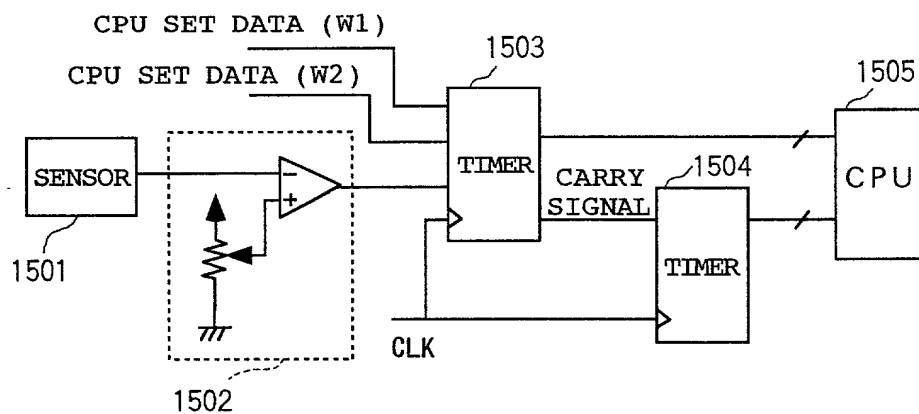


FIG. 16


15/22

FIG. 17

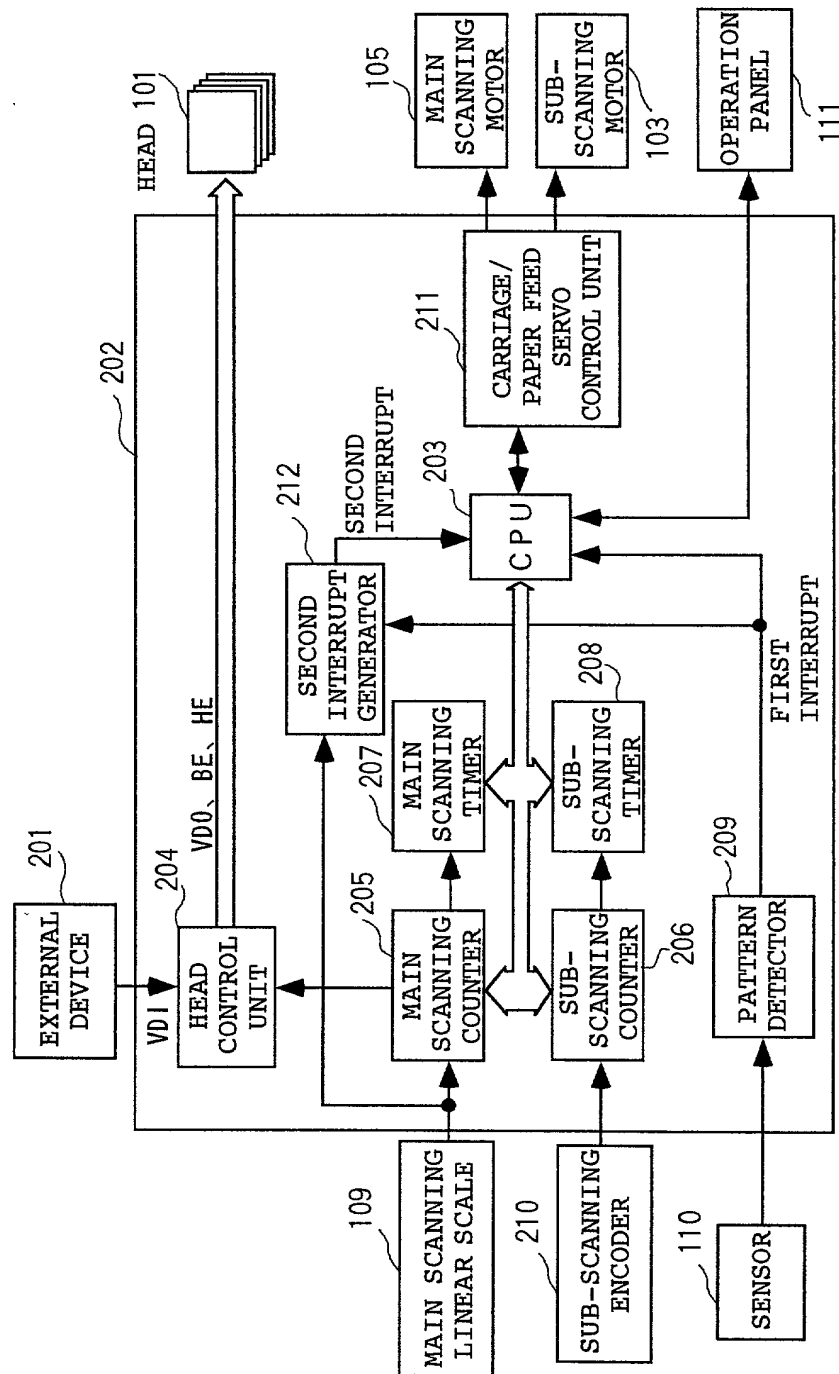

16/22

FIG. 18

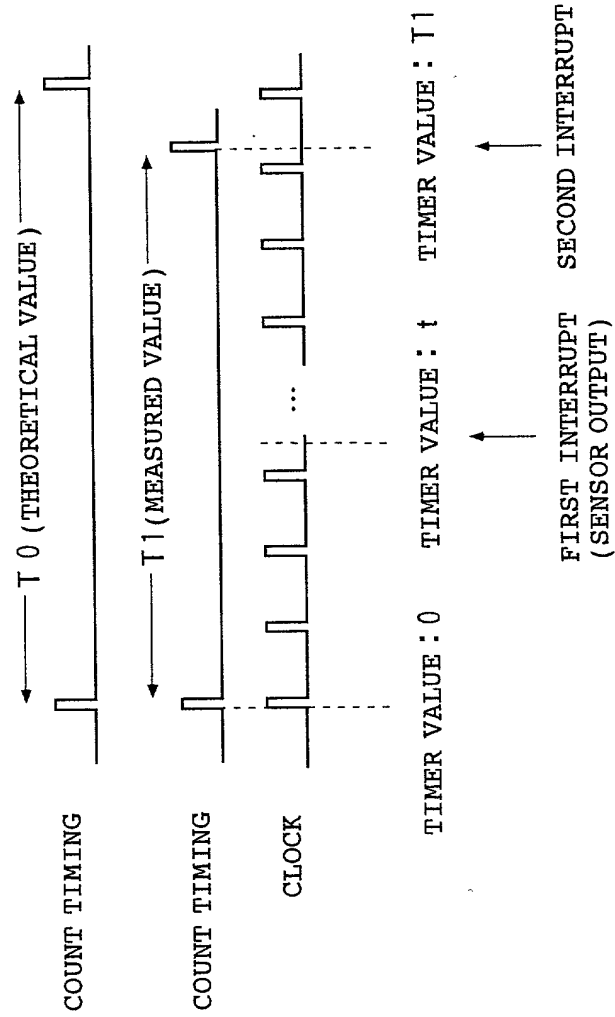

17/22

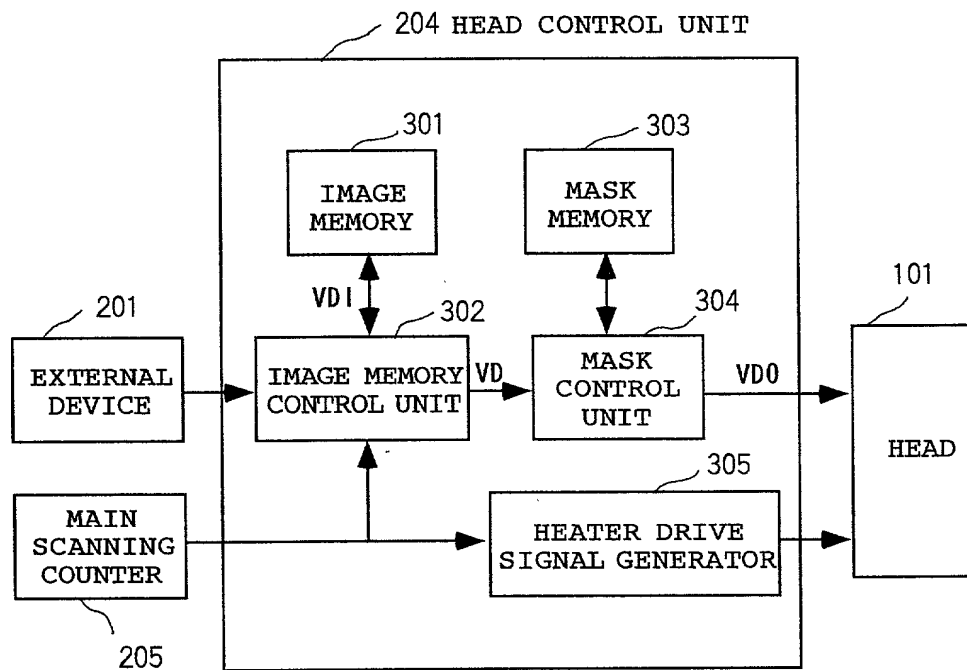


FIG. 19

18/22

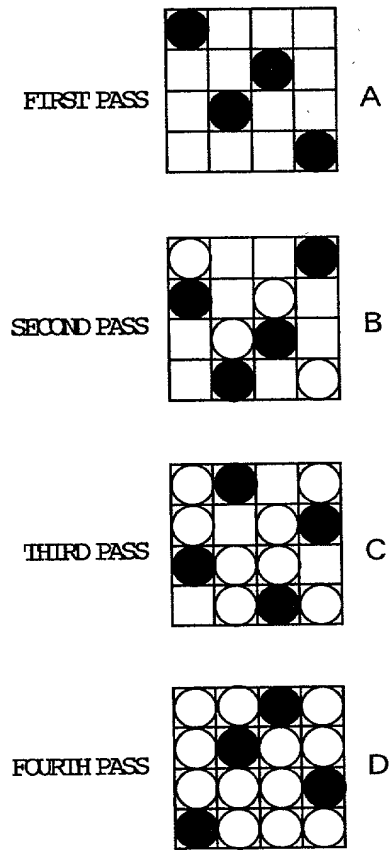


FIG. 20 (a)

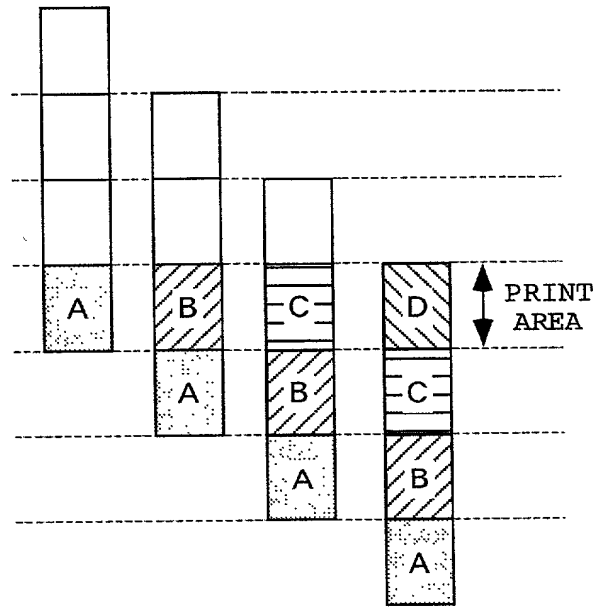


FIG. 20 (b)

19/22

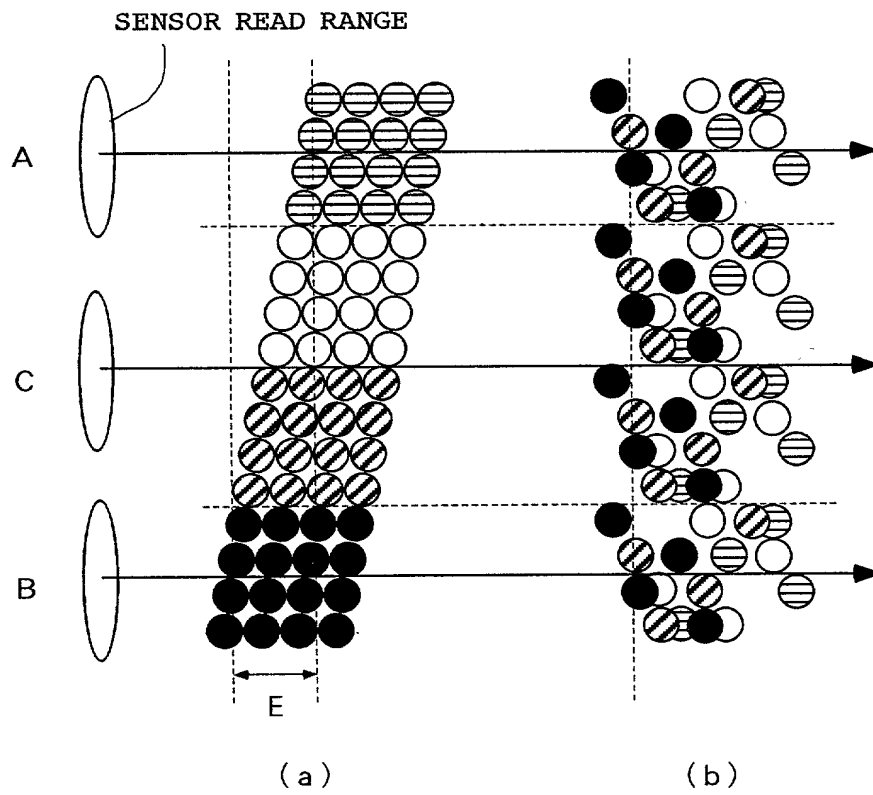


FIG. 21

20/22

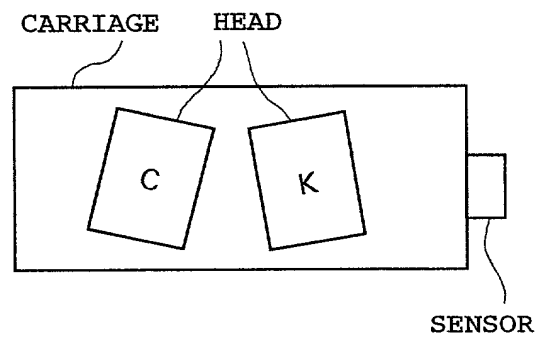


FIG. 22 (a)

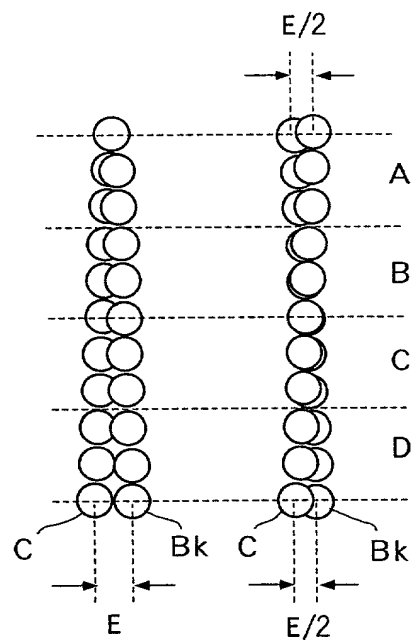


FIG. 22 (b) FIG. 22 (c)

21/22

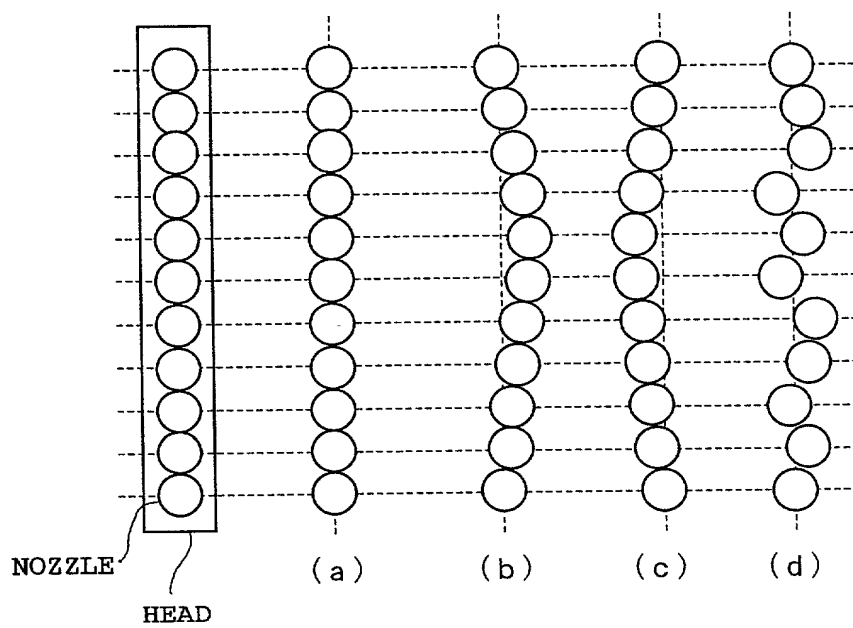


FIG. 23

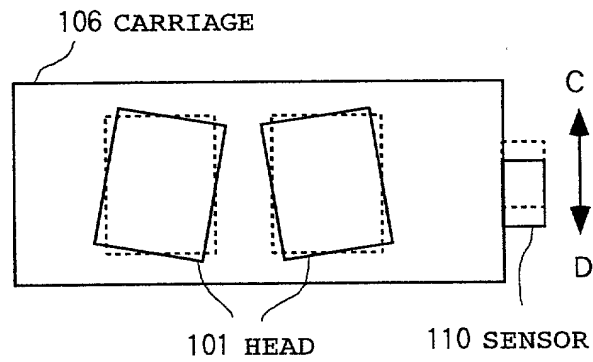


FIG. 24

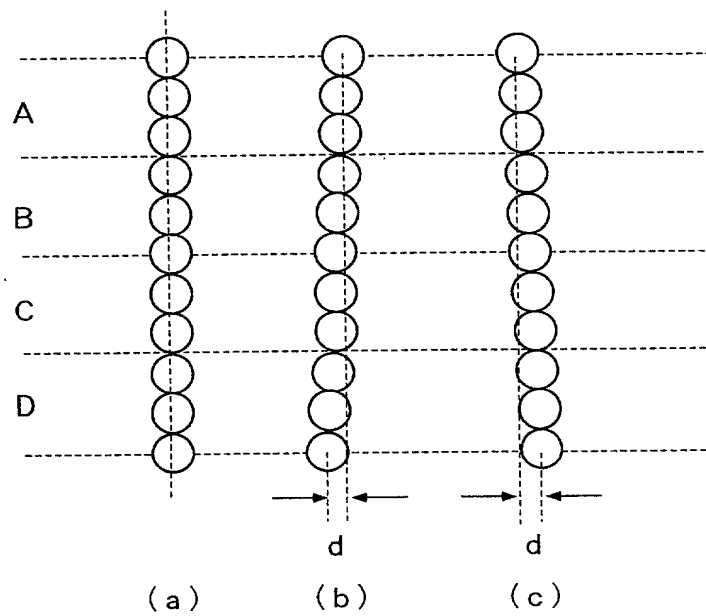


FIG. 25

Attorney's Docket No. Y-189

COMBINED DECLARATION AND POWER OF ATTORNEY
(ORIGINAL APPLICATION)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: IMAGE FORMING DEVICE

the specification of which is attached hereto unless box (a) or (b) is checked, in which case

- (a) ☐ the specification was filed on _____ as Application Serial No. _____.
- (b) ☒ the specification was filed as PCT International Application No. PCT/JP00/02670 filed on Apr. 24, 2000 and was amended under PCT Art. 19 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, sec. 1.56.

I have identified below any foreign application (s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America and filed less than 12 months (6 months for designs) prior to this United States application and of which I claim foreign priority benefits under Title 35, United States Code, sec. 119, and I have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

EARLIEST FOREIGN APPLICATION, AND ALL FOREIGN APPLICATIONS FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U. S. APPLICATION

<u>Country</u>	<u>Application No.</u>	<u>Date of Filing</u> (Month/day/year)
<u>JAPAN</u>	<u>11-114534</u>	<u>04/22/1999</u>
_____	_____	_____
_____	_____	_____

Express Mail #EL898003059 US

As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent:

James H. Walters, Reg. No. 35,731
John P. Dellett, Reg. No. 18,795

Send correspondence to:

Dellett and Walters
310 S. W. Fourth Avenue, Suite 1101
Portland, Oregon 97204
(503) 224-0115

I authorize the attorneys that I have appointed to accept instructions regarding this application and the resulting patent from Yamano & Associates.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Title 18, United States Code, sec. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first joint inventor _____

Yuji Matsuda

Inventor's Signature Yuji Matsuda

Date Sep. 11, 2001 Country of Citizenship Japan

Residence Tokyo, Japan

Post Office Address c/o Copyer Co., Ltd., 3-3, Shimorenjaku
6-chome, Mitaka-shi, Tokyo 181-8520 Japan